


2023

LIST OF PRODUCTS



ÖZBİL A.Ş
www.ozbilas.com

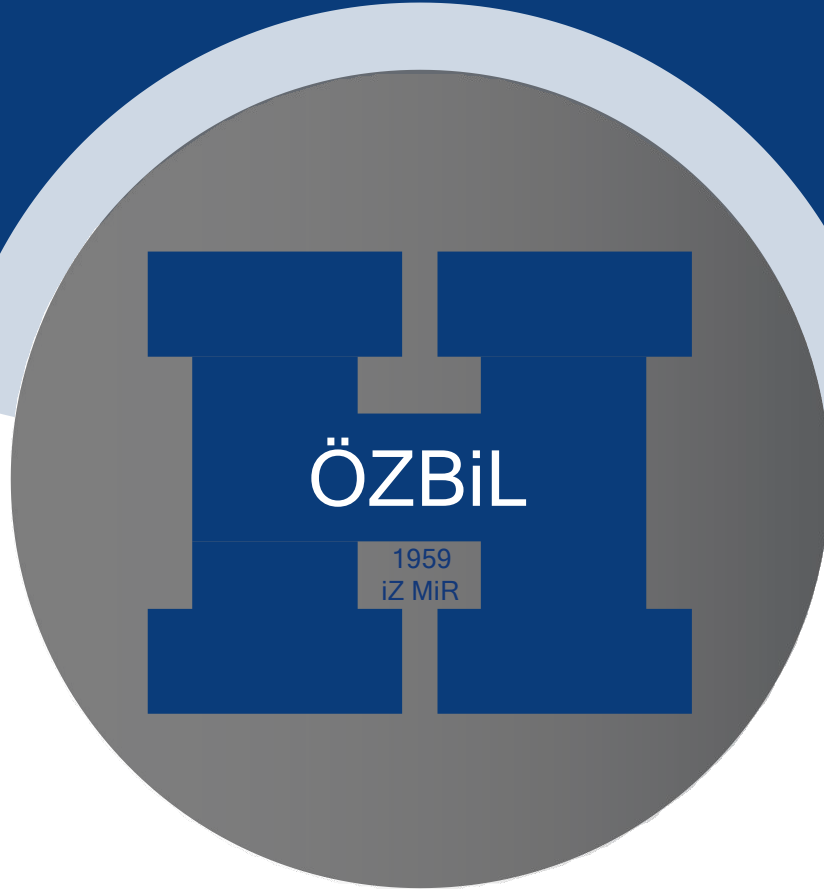

HYDRAULIC HOSES

STEEL WIRE HYDRAULIC HOSES

MULTI SPIRAL HYDRAULIC HOSES

TEXTILE BRAIDED HYDRAULIC HOSES

STEEL WIRE HYDRAULIC HOSES

FORCESTREAM® R1 A/1ST

SAE 100 R1A/DIN-EN 853 1SN

TS EN 853

Made of special synthetic rubber resistant to hydraulic oils, in hydraulic circuits that require high pressure in construction and agricultural machinery.




ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/16"	12.3	250	1100	90	195
1/4"	15.5	225	1030	100	290
5/16"	17.1	215	970	115	335
3/8"	19.4	180	820	130	410
1/2"	22.6	160	700	180	505
5/8"	25.8	130	600	200	585
3/4"	29.8	105	480	240	720
1"	37.6	88	375	300	1035
1 1/4"	45	63	280	420	1340
1 1/2"	51.4	50	260	500	1535
2"	66.4	40	250	630	2275

ULTIMATE 1SN

SAE 100 R1AT/DIN-EN 853 1SN

TS EN 853 135°C

Made of special synthetic rubber resistant to high temperature hydraulic oils, industrial and hydraulic circuits that require high pressure and temperature in mines.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/16"	11.6	250	1100	90	190
1/4"	13.2	225	1030	100	235
5/16"	14.8	215	970	115	275
3/8"	17.2	180	820	130	350
1/2"	20.4	160	700	180	435
5/8"	23.5	130	600	200	500
3/4"	27.5	105	500	240	635
1"	35.4	88	375	300	935
1 1/4"	43.5	63	280	420	1310
1 1/2"	50	50	260	500	1485
2"	63.6	40	250	630	2020
2 1/2"	76.5	40	200	760	2670
3"	88.5	35	160	900	2865

FORCESTREAM R1AT/1 SN

SAE 100 R1 AT/DIN-EN 853 1SN

TS EN 853

Made of special synthetic rubber resistant to hydraulic oils, in hydraulic circuits that require high pressure in work and agricultural machinery.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/16"	11.6	250	1100	90	180
1/4"	13.2	225	1030	100	220
5/16"	14.8	215	970	115	260
3/8"	17.2	180	820	130	330
1/2"	20.4	160	700	180	410
5/8"	23.5	130	600	200	470
3/4"	27.5	105	500	240	585
1"	35.4	88	375	300	870
1 1/4"	43.5	63	280	420	1205
1 1/2"	50	50	260	500	1400
2"	63.6	40	250	630	1910
2 1/2"	76.5	40	200	762	2535
3"	88.5	35	160	900	2710 1,4

FORCESTREAM 1SC

DIN-EN 857 1SC

TS EN 857

Made of special synthetic rubber resistant to hydraulic oils, in hydraulic circuits that require high pressure in construction and agricultural machinery.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
1/4"	12.2	225	1100	50	180
5/16"	13.6	215	1000	55	200
3/8"	15.5	180	900	60	260
1/2"	19	160	800	70	345
5/8"	22.4	130	650	90	420
3/4"	25.8	105	520	100	495
1"	33.4	88	430	160	735


ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

HYDROWASH/1-2

SAE 100 R1 AT-R2 AT/DIN - EN 853 1SN - 2SN

MAX.150°C

Made of special synthetic rubber resistant to 150°C hot water and detergent solutions, for washing with high pressure water.




ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
R1 5/16"	14.8	250	1000	115	260
R2 5/16"	16.5	400	1600	115	435
R1 3/8"	17.2	250	1000	130	335
R2 3/8"	18.9	400	1600	130	550

TWINSTREAM 1 SC - TWINS

DIN-EN 857 1SC

TS EN 857 FLAT TOP

Made of special synthetic rubber resistant to hydraulic oils, in hydraulic circuits requiring high pressure in construction and agricultural machinery.




ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
1/4"x1/4"	12.5 x12.5	225	1100	50	380
5/16"x5/16"	13.9 x13.9	215	1000	55	430
3/8"x3/8"	15.8 x15.8	180	900	60	540
1/2"x1/2"	19.3 x19.3	160	800	70	720

FORCESTREAM R2A/2ST

SAE 100 R2A/DIN-EN 853 2ST

TS EN 853

Made of special synthetic rubber resistant to hydraulic oils, in hydraulic circuits that require high pressure in work and agricultural machinery.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/16"	15.5	415	1850	90	360
1/4"	17.1	400	1700	100	445
5/16"	18.7	350	1550	115	505
3/8"	21	330	1450	130	625
1/2"	24.2	275	1300	180	735
5/8"	27.4	250	1050	200	865
3/4"	31.4	215	920	240	1060
1"	39	165	690	300	1430
1 1/4"	49.8	125	620	420	2120
1 1/2"	56.2	90	520	500	2380
2"	68.8	78	420	630	3045

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

ULTIMATE 2SN

SAE 100 R2 AT/DIN-EN 853 2SN

TS EN 853 135°C

Made of special synthetic rubber resistant to high temperature hydraulic oils, in industrial and mines hydraulic circuits that require high pressure and temperature.




ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/16"	13.3	415	1850	90	305
1/4"	15	400	1700	100	390
5/16"	16.5	350	1550	115	455
3/8"	18.9	330	1450	130	560
1/2"	22.2	275	1300	180	665
5/8"	25.2	250	1050	200	780
3/4"	29.2	215	920	240	965
1"	37.2	165	690	300	1390
1 1/4"	47.3	125	600	420	2075
1 1/2"	53.7	90	500	500	2390
2"	66.7	78	420	630	3065
2 1/2"	79.8	69	300	760	3980
3"	91.9	50	240	900	4165

FORCESTREAM R2AT/2SN

SAE 100 R2 AT/DIN-EN 853 2SN

TS EN 853

Made of special synthetic rubber resistant to hydraulic oils, in hydraulic circuits that require high pressure in work and agricultural machinery.




ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/16"	13.3	415	1850	90	295
1/4"	15	400	1700	100	375
5/16"	16.5	350	1550	115	430
3/8"	18.9	330	1450	130	540
1/2"	22.2	275	1300	180	640
5/8"	25.2	250	1050	200	750
3/4"	29.2	215	920	240	925
1"	37.2	165	690	300	1290
1 1/4"	47.3	125	620	420	1890
1 1/2"	53.7	90	520	500	2100
2"	66.7	78	420	630	2760
2 1/2"	79.8	69	300	760	3810
3"	91.9	50	240	900	4040

FORCESTREAM 2SC

DIN-EN 857 2SC

TS EN 857

Made of special synthetic rubber resistant to hydraulic oils, in hydraulic circuits that require high pressure in work and agricultural machinery.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
1/4"	13.2	400	1850	45	285
5/16"	15	350	1700	55	330
3/8"	17.1	330	1550	65	410
1/2"	20.7	275	1300	80	575
5/8"	23.8	250	1150	90	685
3/4"	27.7	215	1000	120	810
1"	35.5	165	840	160	1170

FORCESTREAM R5

SAE J517 100 R5

Made of special synthetic rubber resistant to hydraulic oils, in hydraulic circuits that require high pressure in work and agricultural machinery.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/16"	12.9	210	1100	75	245
1/4"	14.5	210	1000	85	285
5/16"	16.8	157	800	100	350
13/32"	19.1	140	700	115	405
1/2"	22.9	122	600	140	560
5/8"	27.1	105	520	165	695
7/8"	30.8	56	380	185	690
1 1/8"	37.6	43	300	230	910
1 3/8"	44.5	35	250	265	1135
1 13/16"	56.4	24	200	335	1370
2 3/8"	73	24	150	610	2270

TWINSTREAM 2 SC - TWINS

DIN-EN 857 2SC

TS EN 857 FLAT TOP

Made of special synthetic rubber resistant to hydraulic oils, in hydraulic circuits that require high pressure in work and agricultural machinery.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
1/4"x1/4"	13.5x13.5	400	1850	45	600
5/16"x5/16"	15.3x15.3	350	1700	55	690
3/8"x3/8"	17.4x17.4	330	1550	65	855
1/2"x1/2"	21x21	275	1270	80	1185

ULTIMATE R5

SAE J517 100 R5

135°C

Made of special synthetic rubber resistant to high temperature hydraulic oils, in industry and mines hydraulic circuits that require high pressure and temperature.




ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/16"	12.9	210	1100	75	255
1/4"	14.5	210	1000	85	295
5/16"	16.8	157	800	100	370
13/32"	19.1	140	700	115	430
1/2"	22.9	122	600	140	590
5/8"	27.1	105	520	165	735
7/8"	30.8	56	380	185	725
1 1/8"	37.6	43	300	230	945
1 3/8"	44.5	35	250	265	1170
1 13/16"	56.4	24	200	335	1420
2 3/8"	73	24	150	610	2355

SUPERSTREAM 2K - COMPACT

EXCEED DIN-EN 857 2SC

SUPER FLEXIBLE/ HIGH PRESSURE

Made of special synthetic rubber resistant to hydraulic oils, in hydraulic circuits that require high pressure in work and agricultural machinery.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
1/4"	13.1	450	1950	45	285
5/16"	15	420	1725	60	330
3/8"	17.1	385	1650	70	440
1/2"	20.3	345	1400	90	565
5/8"	23.7	290	1200	130	660
3/4"	27.7	280	1200	160	835
1"	35.6	200	900	210	1215

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m



An Eaton Brand

MULTISPIRAL HYDRAULIC HOSES

POWERSTREAM 4SP

TS EN 856 4SP

SPIRAL STEEL WIRE HYDRAULIC

Made of special synthetic rubber resistant to mineral, vegetable and glucose-based hydraulic oils, in systems that will be exposed to very high peak pressures and harsh conditions.



ID	OD	OP	BP	BR	WEIGHT
Inch	mm	bar	bar	mm	gr/m
1/4"	17.6	450	1800	150	565
3/8"	21.2	445	1780	180	730
1/2"	24.4	415	1660	230	865
5/8"	28	350	1400	250	1035
3/4"	32	350	1400	300	1485
1"	39.1	280	1120	340	1900

POWERSTREAM 4SH

TS EN 856 4SH

SPIRAL STEEL WIRE HYDRAULIC

Made of special synthetic rubber resistant to mineral, vegetable and glucose-based hydraulic oils, in systems that will be exposed to very high peak pressures and harsh conditions.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/4"	32	420	1680	280	1465
1"	38.4	380	1520	340	2035
1 1/4"	45.2	350	1400	460	2385
1 1/2"	53	290	1160	560	3185
2"	67.6	250	1000	700	4365

POWERSTREAM R12+

TS EN 856 R12

HIGH PRESSURE HYDRAULIC 120°C

Made of special synthetic rubber resistant to mineral, vegetable and glucose-based hydraulic oils, in systems that will be exposed to very high peak pressures and harsh conditions.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/8"	20	280	1450	100	600
1/2"	23.5	280	1350	125	740
5/8"	27.6	280	1350	140	1030
3/4"	30.5	280	1350	150	1165
1"	38.1	280	1300	225	1760
1 1/4"	46.6	210	1100	250	2465
1 1/2"	53.2	175	1100	500	2870
2"	66.8	175	900	650	4030

POWERSTREAM R13

TS EN 856 R13

HIGH PRESSURE HYDRAULIC 120°C

Made of special synthetic rubber resistant to mineral, vegetable and glucose-based hydraulic oils, it will be exposed to very high peak pressures and difficult conditions, used in hydraulic systems.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/4"	32	345	1380	240	1590
1"	38.4	345	1380	300	2030
1 1/4"	49.3	345	1380	420	3815
1 1/2"	57.3	345	1380	500	4770
2"	71.6	345	1380	630	6310

DN.19-25 mm 4 layers spiral steel wire reinforced
DN.32-50 mm 6 layers spiral steel wire reinforced

POWERSTREAM R15

SAE 100 R15

HIGH PRESSURE HYDRAULIC 120°C

Made of special synthetic rubber resistant to mineral, vegetable and glucose-based hydraulic oils, it will be exposed to very high peak pressures and difficult conditions, in hydraulic systems



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/8"	21.2	420	1680	150	730
1/2"	24.4	420	1680	200	865
5/8"	28.7	420	1680	235	1195
3/4"	32	420	1680	265	1465
1"	38.4	420	1680	330	2035
1 1/4"	49.3	420	1680	445	3815
1 1/2"	49.3	420	1680	530	4770

LATHE D0/6

ISO 18752 GRADE C

VERY HIGH PRESSURE HYDRAULIC 120°C

Made of special synthetic rubber resistant to mineral, vegetable and glucose-based hydraulic oils, in hydraulic systems, marine platforms and mines that will be exposed to very high peak pressures and harsh conditions.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/4"	35.4	600	2450	300	2640
1"	41.2	552	2250	350	2980
1 1/4"	51.8	525	2130	420	4125
1 1/2"	59	475	1900	500	5095
2"	72	420	1680	600	6655
2 1/2"	86	350	1400	800	8740
3"	97.3	210	900	900	10300

SELBLAST 4

WATERBLAST

Spiral Steel Wire Hydraulic

Made of special synthetic rubber resistant to mineral, vegetable and glucose-based hydraulic oils, in hydraulic systems that will be exposed to very high peak pressures and difficult conditions, in water abrasion systems.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
1/4"	17.6	1000	2500	125	610
3/8"	21.3	850	2125	150	755
1/2"	24.6	800	2000	180	885
3/4"	32	720	1800	220	1535

SELBLAST 4+

WATERBLAST

Spiral Steel Wire Hydraulic

Made of special synthetic rubber resistant to mineral, vegetable and glucose-based hydraulic oils, in hydraulic systems that will be exposed to very high peak pressures and difficult conditions, in water abrasion systems.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
1/4"	17.6	1250	3125	200	615
3/8"	20.4	1250	3125	210	875
1/2"	24.6	1100	2750	230	1215
3/4"	32	1100	2750	250	1855

POWERSTREAM® X-4000

EXCEED EN 856 R12

Extra Flexible 120°C

Made of special synthetic rubber resistant to mineral, vegetable and glucose-based hydraulic oils, in hydraulic systems that will be exposed to very high peak pressures and harsh conditions and require low bending radii.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/8"	19.2	280	1120	65	525
1/2"	22.6	280	1120	90	750
5/8"	26.8	280	1120	100	910
3/4"	30.4	280	1120	120	1125
1"	38.1	280	1120	150	1705
1 1/4"	46.6	280	1120	210	2490

POWERSTREAM® X-5000

Extra Flexible 120°C

Made of special synthetic rubber resistant to mineral, vegetable and glucose-based hydraulic oils, in hydraulic systems that will be exposed to very high peak pressures and harsh conditions and require low bending radii.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/8"	19.3	350	1400	90	560
1/2"	22.2	350	1400	115	755
5/8"	26	350	1400	125	925
3/4"	31	350	1400	140	1320
1"	38.4	350	1400	150	1950
1 1/4"	45.2	350	1400	350	2495

POWERSTREAM® X-6000

EXCEED EN 856 R12

Extra Flexible 120°C

Made of special synthetic rubber resistant to mineral, vegetable and glucose-based hydraulic oils, in hydraulic systems that will be exposed to very high peak pressures and harsh conditions and require low bending radii.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/8"	20.6	420	1680	110	745
1/2"	23.5	420	1680	120	885
5/8"	27	420	1680	140	1060
3/4"	32	420	1680	170	1470
1"	38.1	420	1680	220	2015
1 1/4"	49.3	420	1680	265	3785

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

TEXTILE BRAIDED HYDRAULIC HOSES

SELTEX R6

EN 854 R6 SAE 100 R6

TS EN 854 R6

Made of special synthetic rubber resistant to hydraulic oils, for high pressure hydraulic oil, fuel oil, grease, water and air discharge in hydraulically controlled units.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/16"	10.7	34	250	35	90
1/4"	12.3	28	200	45	105
5/16"	13.9	28	200	65	125
3/8"	15.5	28	200	75	150
1/2"	19.5	28	200	90	225
5/8"	22.6	24	140	115	260
3/4"	25.8	21	130	140	315
1"	33.2	20	100	150	470

ULTIMATE R6

EN 854 R6 SAE 100 R6

TS EN 854 R6 135°C

Made of special synthetic rubber resistant to high temperature hydraulic oils, in hydraulically controlled units- high pressure hydraulic oil, fuel oil, grease oil discharge.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/16"	10.7	34	250	35	100
1/4"	12.3	28	200	45	120
5/16"	13.9	28	200	65	140
3/8"	15.5	28	200	75	165
1/2"	19.5	28	200	90	245
5/8"	22.6	24	140	115	290
3/4"	25.8	21	130	140	345
1"	33.2	20	100	150	505

SELTEX R3

EN 854 R3 SAE 100 R3

TS EN 854 R3

Made of special synthetic rubber resistant to hydraulic oils, high pressure hydraulic oil, fuel-oil, grease, water and air discharge in hydraulically controlled units.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/16"	12.7	103	412	80	155
1/4"	14.3	86	400	80	185
5/16"	17.5	83	370	100	270
3/8"	19.1	78	340	100	300
1/2"	23.8	69	300	125	435
5/8"	27	60	270	140	500
3/4"	31.8	52	240	150	695
1"	38.1	39	190	205	865
1 1/4"	44.5	26	140	255	995
1 1/2"	51	20	110	295	1170

SELTEX 1TE

EN 854 1 TE

TS EN 854 1TE

Made of special synthetic rubber resistant to hydraulic oils, high pressure hydraulic oil, fuel-oil, grease, water and air discharge in hydraulically controlled units.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/16"	10.7	25	230	35	95
1/4"	12.3	25	180	34	115
5/16"	13.9	20	180	65	130
3/8"	15.5	20	170	75	155
1/2"	19	16	160	90	205
5/8"	22.6	16	130	115	265
3/4"	25.8	12	120	140	315
1"	33.2	12	95	150	475

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

SELTEX 2TE

EN 854 2 TE

TS EN 854 2TE

Made of special synthetic rubber resistant to hydraulic oils, for high pressure hydraulic oil, fuel-oil, grease, water and air discharge in hydraulically controlled units.



ID	OD	OP	BP	BR	WEIGHT	
inch	mm	bar	bar	mm	gr/m	
3/16"	11.8	80	410	25	115	
1/4"	13.4	75	400	40	150	
5/16"	14.9	68	380	50	170	
3/8"	16.5	63	310	60	195	
1/2"	19.7	58	280	70	240	
5/8"	23.9	50	260	90	325	
3/4"	27	45	230	110	380	
1"	34.4	40	200	150	545	
1 1/4"	41.4	35	180	170	740	
1 1/2"	48.1	30	180	190	870	

SELTEX 3TE

EN 854 3 TE

TS EN 854 3TE

Made of special synthetic rubber resistant to hydraulic oils, for high pressure hydraulic oil, fuel-oil, grease, water and air discharge in hydraulically controlled units.



ID	OD	OP	BP	BR	WEIGHT	
inch	mm	bar	bar	mm	gr/m	
3/16"	12.8	160	700	40	135	
1/4"	14.4	145	630	45	165	
5/16"	16.9	130	580	55	215	
3/8"	18.5	110	500	70	245	
1/2"	21.7	93	440	85	305	
5/8"	25.9	80	380	105	410	
3/4"	29	70	330	130	465	
1"	35.9	55	280	150	630	
1 1/4"	42.3	45	220	190	755	
1 1/2"	49.6	40	190	240	965	
2"	62.3	33	160	300	1280	
2 3/8"	72	25	140	400	1555	

SELTEX R4

SAE J 517 R4

Special synthetic rubber resistant to hydraulic oils and fuels is used in the return circuits of hydraulic systems in work and agricultural machinery.



ID	OD	OP	BP	BR	WEIGHT	
inch	mm	bar	bar	mm	gr/m	
3/4"	32	21	84	125	755	
1"	37.4	17	68	150	885	
1 1/4"	45	14	56	200	1140	
1 1/2"	52	10	40	255	1550	
2"	64	7	28	300	1890	
2 1/2"	77	4	16	355	2377	
3"	90	4	16	460	3121	
3 1/2"	103	3	12	590	3416	
4"	116	2	8	610	4171	

SELTEX R4 X

SAE J 517 R4

Extra Flexible

Special synthetic rubber resistant to hydraulic oils and fuels, in the return circuits of hydraulic systems in work and agricultural machinery. High flexibility.



ID	OD	OP	BP	BR	WEIGHT	
inch	mm	bar	bar	mm	gr/m	
3/4"	29	21	84	50	522	
1"	35	17	68	65	638	
1 1/4"	42	14	56	85	825	
1 1/2"	49	10	40	95	1075	
2"	62	7	28	135	1544	
2 1/2"	75.5	4	16	180	2018	
3"	88	4	16	225	2505	
3 1/2"	103	3	12	270	3162	
4"	115	2	8	390	3635	

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

SELBRAKE

SAE J 1401

Hydraulic Brake TS ISO 3996

Made of special synthetic rubber resistant to brake oil, in hydraulic brake systems of road vehicles.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/8"	10.5	276	490	90
3/16"	13	276	345	130

SELBRAKE 2

SAE J 1402

Air Brake

Made of special synthetic rubber, it is available in air brake systems in the automotive industry, bandaged and flat.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/8"	19	20.7	62	89	260
1/2"	22.2	20.7	62	102	325
5/8"	26.9	20.7	62	114	475

SPIRALGUARDS

SPIRAL PROTECTION

Protection sleeve for hoses and cables. It is made of polyethylene and polyamide upon request.



POLYETHYLENE SPIRAL PROTECTION

ID	OD	WEIGHT	Box Quantity
inch	mm	gr/m	m
7.5	10	32	400
9.5	12	39	300
13	16	64	150
16	20	106	100
20	25	166	60
24	29	196	50
27	32	217	40
30	35	239	30
35	40	276	25
44	50	415	15
50	60	810	10
60	70	958	8
65	75	1032	5
75	85	1180	5
80	90	1252	5
100	110	1548	2.5

POLYAMIDE SPIRAL PROTECTION

ID	OD	WEIGHT	Box Quantity
inch	mm	gr/m	m
7.5	10	37	400
9.5	12	45	300
13	16	74	150
16	20	122	100
20	25	190	60
24	29	225	50
27	32	250	40
30	35	275	30
35	40	317	25
44	50	477	15
50	60	931	10
60	70	1083	8
65	75	1134	5
75	85	1295	5
80	90	1377	5
100	110	1700	2.5

(Box quantity is for packaging information. Prices are the price per meter.)

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m