


2023

LIST OF PRODUCTS



ÖZBİL A.Ş
www.ozbilas.com

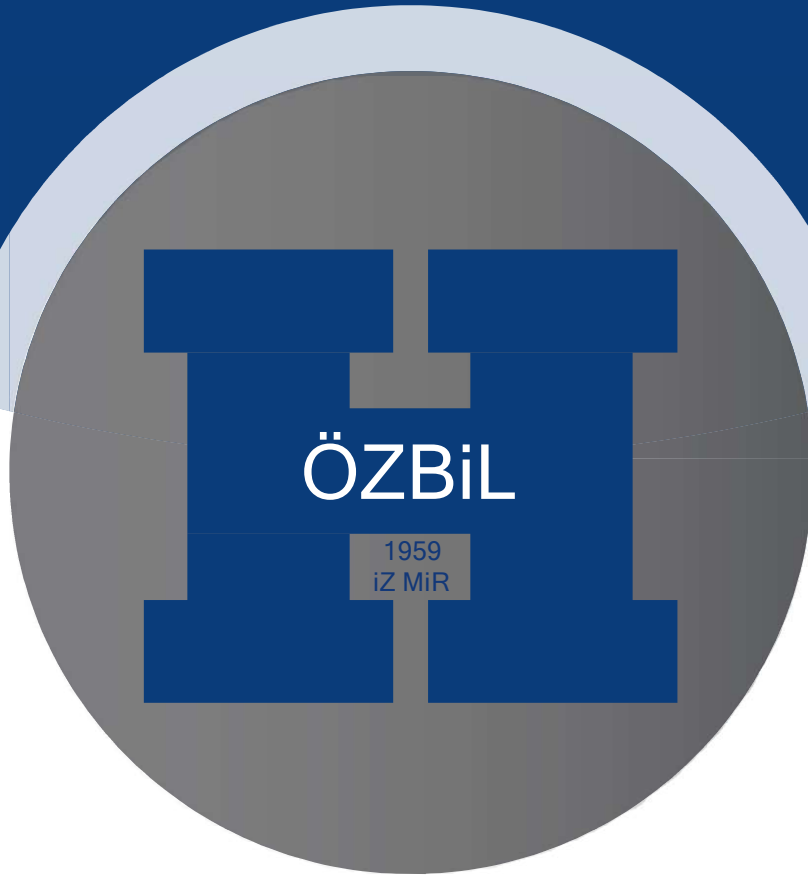

INDUSTRIAL HOSES

WATER HOSES

AIR HOSES

STEAM AND HOT WATER HOSES CORROSIVE

MATERIAL HOSES

FOOD HOSES

FUEL HOSES

CHEMICAL SUBSTANCE HOSES

WATER HOSES

AEGEAN 6

LOW PRESSURE WATER

TS EN ISO 1403/TYPE1

Made of natural and synthetic rubber, for home, garden, construction and irrigation works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	20	6	18	277
5/8"	23	6	18	322
3/4"	26	6	18	385
1"	33	6	18	510
1 1/8"	36	6	18	608
1 1/4"	40	6	18	632
1 1/2"	46	6	18	740
1 3/4"	53	6	18	930
2"	60	6	18	1195
2 1/2"	73	6	18	1491
2 3/4"	80	6	18	1750
3"	86	6	18	1811
4"	112	6	18	2545

AEGEAN 10

MEDIUM PRESSURE WATER

TS EN ISO 1403/TYPE2

Made of natural and synthetic rubber, for irrigation works that require medium pressure use in all parts of the industry.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	20	10	30	277
5/8"	23	10	30	322
3/4"	27	10	30	435
1"	33	10	30	499
1 1/4"	41	10	30	749
1 1/2"	47	10	30	895
1 3/4"	54	10	30	1101
2"	60	10	30	1183
2 1/2"	74	10	30	1670
2 3/4"	82	10	30	2061
3"	88	10	30	2193
4"	115	10	30	3286
5"	140	10	30	3861
6"	165	10	30	4560

AEGEAN 25

HIGH PRESSURE WATER

TS EN ISO 1403/TYPE3

Made of natural and synthetic rubber, for irrigation works that require the use of high pressure in all parts of the industry.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	21	25	75	330
5/8"	26	25	75	492
3/4"	29	25	75	553
1"	36.5	25	75	763
1 1/4"	44	25	75	1030
1 1/2"	51	25	75	1330
1 3/4"	58	25	75	1352
2"	65	25	75	1859
2 1/2"	79	25	75	2560
2 3/4"	87	25	75	3037
3"	93	25	75	3072
4"	119	25	75	4491

MARMARA

INDUSTRIAL WATER

TS EN ISO 1403/TYPE2

Made of natural and synthetic rubber, construction industry, ship and all kinds of irrigation works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	20	10	30	255
5/8"	23	10	30	305
3/4"	27	10	30	401
7/8"	30	10	30	443
1"	33	10	30	492
1 1/8"	36	10	30	520
1 1/4"	41	10	30	712
1 3/8"	44	10	30	810
1 1/2"	47	10	30	830
1 5/8"	50	10	30	877
1 3/4"	54	10	30	1025
2"	60	10	30	1102
2 1/2"	74	10	30	1550
2 3/4"	82	10	30	2019
3"	88	10	30	2105
4"	115	10	30	3155

ID	OD	OP	BP	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	gr/m

LONG SU-10

FLAT TOP

TS EN ISO 1403/TYPE2
Made of natural and synthetic rubber, for home, garden, construction and irrigation works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	11	10	30	105
5/16"	14	10	30	160
3/8"	16	10	30	190
1/2"	19	10	30	230
5/8"	23	10	30	330
3/4"	27	10	30	440
1"	34	10	30	630

LONG SU-10

FLAT TOP

Made of natural and synthetic rubber, for home, garden, construction and irrigation works



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	11	10	30	105
5/16"	14	10	30	160
3/8"	16	10	30	190
1/2"	19	10	30	230
5/8"	23	10	30	330
3/4"	27	10	30	440
1"	34	10	30	630

BLACK SEA-10

WATER TRANSMITTER

Made of natural and synthetic rubber, in all kinds of water absorption and pressing works in construction and industry.



ID	OD	OP	BP	VACUUM	WEIGHT
inch	mm	bar	bar	bar	gr/m
1"	34	10	30	-0.92	635
1 1/4"	42	10	30	-0.92	924
1 1/2"	48	10	30	-0.92	1165
1 3/4"	55	10	30	-0.92	1440
2"	62	10	30	-0.92	1738
2 1/2"	75	10	30	-0.92	2200
2 3/4"	82	10	30	-0.92	2541
3"	89	10	30	-0.92	2845
4"	115	10	30	-0.92	3930
5"	142	10	30	-0.80	5620
6"	168	10	30	-0.80	7340
8"	225	10	30	-0.80	13650
10"	279	10	30	-0.80	18170

MEDITERRANIAN

SPIRAL WATER ABSORBER

TS EN ISO 4641/TYPE1
Made of natural and synthetic rubber, for all kinds of water absorption and compression works in fields, gardens, construction and industry.



ID	OD	OP	BP	VACUUM	WEIGHT
inch	mm	bar	bar	bar	gr/m
1"	34	3	10	-0.63	635
1 1/4"	42	3	10	-0.63	865
1 1/2"	48	3	10	-0.63	1090
2"	61	3	10	-0.63	1402
2 1/2"	74	3	10	-0.63	2090
3"	88	3	10	-0.63	2660
4"	115	3	10	-0.63	3540
5"	145	3	10	-0.63	5470
6"	170	3	10	-0.63	6965
8"	225	3	10	-0.63	9245
10"	280	3	10	-0.63	15930
12"	329	3	10	-0.63	18915

(0-2 m lengths are 100% increased)

ID	OD	OP	BP	WEIGHT	PRICE
inner diameter	outer diameter	operating pressure	burst pressure	gr/m	€

FLAT 5

CLOTHED TRANSMITTER 5 BAR

Made of natural and synthetic rubber, in field, garden, construction irrigation and water discharge works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
2"	56	5	15	705
2 1/2"	69	5	15	871
3"	82	5	15	1031
4"	108	5	15	1090
5"	134	5	15	1592
6"	160	5	15	2145
8"	212	5	15	2718
10"	264	5	15	4160

FLAT-10

CLOTHED TRANSMITTER 10 BAR

Made of natural and synthetic rubber, in field, garden, construction irrigation and water discharge works.




ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
2"	57	10	30	785
2 1/2"	70	10	30	968
3"	83	10	30	1232
4"	109	10	30	1785
5"	136	10	30	2650
6"	162	10	30	3556
8"	217	10	30	6285
10"	268	10	30	8280

TB KUKA-200

GROOVING (WITH BOTH END FITTING)

TSE K380

Made of NR/SBR rubber, channel, in sewer cleaning works.




ID	OD	OP	BP	KYÇ/r	Ağr
inch	mm	bar	bar	mm	gr/m
1/2"	25	200	500	65	430
5/8"	28	200	500	75	450
3/4"	31.6	200	500	90	545
1"	39.3	200	500	100	770
1 1/4"	48	200	500	130	1040

TB KUKA-250

GROOVING (WITH BOTH END FITTING)

TSE K380

Made of NR/SBR rubber, channel, in sewer cleaning works.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
1/2"	25	250	625	65	440
5/8"	28	250	625	75	480
3/4"	31.6	250	625	90	555
1"	39.3	250	625	100	780
1 1/4"	48	250	625	130	1060

TB KUKA-250

GROOVING (WITH BOTH END FITTING)

Made of NR/SBR rubber, channel, in sewer cleaning works.



ID	OD	OP	BP	BR	Weight
inch	mm	bar	bar	mm	gr/m
1/2"	25	250	625	65	440
5/8"	28	250	625	75	480
3/4"	31.6	250	625	90	555
1"	39.3	250	625	100	780
1 1/4"	48	250	625	130	1060

MILAS-40

FIRE EXTINGUISHING

TS EN 1947/TİPC

Made of synthetic rubber, in fire extinguishers.



ID	OD	OP	BP	BR	WEIGHT
inch	mm	bar	bar	mm	gr/m
3/4"	32.5	40	120	190	715
1"	39	40	120	200	870

ID	OD	OP	BP	BR
inner diameter	outer diameter	operating pressure	burst pressure	bend radius


AIR HOSES

SKY-10

LIGHT DUTY AIR

TS EN • ISO 2398 TYPE1 CLASS A

Made of natural and synthetic rubber, for air-operated tools and compressed air evacuation.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	22	10	40	400
5/8"	25	10	40	444
3/4"	29	10	40	564
1"	36	10	40	661
1 1/8"	39	10	40	866
1 1/4"	44	10	40	1051
1 1/2"	51	10	40	1341
1 3/4"	57	10	40	1426
2"	63	10	40	1619
2 1/2"	78	10	40	2368
2 3/4"	84	10	40	2519
3"	92	10	40	3074
4"	117	10	40	3828

SKY-20

NORMAL SERVICE AIR

TS EN • ISO 2398 TYPE2 CLASS A

Made of natural and synthetic rubber, in compressed air transport, especially in mines.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	22	16	64	332
5/8"	25	16	64	374
3/4"	29	16	64	504
1"	36	16	64	670
1 1/4"	44	16	64	955
1 1/2"	51	16	64	1177
1 3/4"	60	16	64	1630
2"	65	16	64	1655
2 1/2"	80	16	64	2450
2 3/4"	85	16	64	2600
3"	92	16	64	2650
4"	118	16	64	3810

SKY-25

HEAVY DUTY AIR

T5 EN • 150 2398 TYPE3 CLASS A

Natural and synthetic rubber products, construction and industry in all kinds of water absorption and compression works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	23	25	100	380
5/8"	26	25	100	450
3/4"	30	25	100	570
1"	37	25	100	720
1 1/4"	44	25	100	950
1 1/2"	51	25	100	1210
1 3/4"	60	25	100	1660
2"	66	25	100	1825
2 1/2"	80	25	100	2505
2 3/4"	86	25	100	2665
3"	92	25	100	2785
4"	118	25	100	3530

MOON-40

STEEL WIRE MESH AIR

Oil-resistant, synthetic nitrile rubber-made, steel wire reinforced and used in mines and high-pressure air discharge



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	23	40	160	511
3/4"	29.5	40	160	630
1"	36	40	160	880
1 1/4"	43	40	160	1110
1 1/2"	50	40	160	1540
2"	66	40	160	2515
2 1/2"	80	40	160	3360
3"	94	40	160	4500
4"	122	40	160	6771

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

LONG-KOMP 10 BAR

LIGHT SERVICE AIR

Natural and synthetic rubber products in air-powered tools and compressed air evacuation.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	11	10	30	100
5/16"	14	10	30	105
3/8"	16	10	30	160
1/2"	19	10	30	190
5/8"	23	10	30	235
3/4"	27	10	30	440
1"	34	10	30	635

LONG-KOMP16 BAR

NORMAL SERVICE AIR

TS EN - ISO 2398 TYPE 2 CLASS

Natural and synthetic rubber products in air-powered tools and compressed air evacuation.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	13	16	64	160
5/16"	15	16	64	195
3/8"	18	16	64	270
1/2"	22	16	64	395
5/8"	25	16	64	450
3/4"	29	16	64	585
1"	37	16	64	1890

LONG-KOMP 10 BAR

LIGHT SERVICE AIR

TS EN-ISO 2398 TYPE 1CLASS A

Natural and synthetic rubber products in air-powered tools and compressed air evacuation.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	11	10	40	100
5/16"	14	10	40	105
3/8"	16	10	40	160
1/2"	19	10	40	190
5/8"	23	10	40	235
3/4"	27	10	40	440
1"	34	10	40	635

LONG-KOMP 20 BAR

NORMAL SERVICE AIR

Natural and synthetic rubber products, in the transport of high-pressure air, in mines.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	13	20	60	160
5/16"	15	20	60	195
3/8"	18	20	60	270
1/2"	22	20	60	395
5/8"	25	20	60	450
3/4"	29	20	60	585
1"	37	20	60	1890

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

ANTHEM

DUST AND AIR INTAKE

Made of natural and synthetic rubber, hot and cold weather, dust, soot, sawdust, industrial crumbs, seeds, grains, etc. In the work of conveying and suction.



ID	OD	OP	BP	VACUUM	WEIGHT
inch	mm	bar	bar	bar	gr/m
1"	32	-	-	-0.60	417
1 1/4"	39	-	-	-0.60	617
1 1/2"	45	-	-	-0.60	721
1 3/4"	52	-	-	-0.60	806
2"	58	-	-	-0.60	912
2 1/2"	72	-	-	-0.60	1407
2 3/4"	78	-	-	-0.60	1500
3"	84.5	-	-	-0.60	1694
4"	110	-	-	-0.60	2336
5"	135	-	-	-0.60	3176
6"	162	-	-	-0.60	4171
8"	214	-	-	-0.60	6282
10"	267	-	-	-0.60	8795
12"	315	-	-	-0.60	10430

(0-2 mt sizes are 100% increased)

URANUS

LPG Welding

TS EN ISO 3821 (Fireproof)

Gaseous LPG resistant special black flat synthetic rubber products, butane or prop on welding works, LPG and gas transportation.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	13	20	60	155
5/16"	15	20	60	190
3/8"	17	20	60	220

JUPITER

Oxygen-Acetylene Source

TS EN ISO 3821 (Fireproof)

Oxygen and acetylene resistant synthetic nitrile rubber products, industrial oxygen and acetylene supply works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	13	20	60	155
5/16"	15	20	60	185
3/8"	17	20	60	220

ARGON

ARGON Welding

TS EN ISO 3821 (Fireproof)

Synthetic rubber products, industrial argon and argon welding works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	13	20	60	155
5/16"	15	20	60	190
3/8"	17	20	60	220

JUPITER TWIN

Oxygen-Acetylene Source

TS EN ISO 3821 (Flammable)

It is made of synthetic nitrile rubber resistant to oxygen and acetylene in industrial oxygen and acetylene welding works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	13	20	60	320
5/16"	15	20	60	390
3/8"	17	20	60	460

ID	OD	OP	BP	BR	WEIGHT	PRICE
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m	€

STEAM and HOT WATER HOSES

STEAM1A

CLOTHED STEAM

TS EN ISO 6134 TYPE 1 CLASS A
165 °C saturated steam resistant EPM rubber product, steam evacuation works, general industrial use.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	25	6	60	390
5/8"	30	6	60	560
3/4"	33	6	60	630
1"	40	6	60	811
1 1/4"	48	6	60	1130
1 1/2"	54	6	60	1275
1 3/4"	60	6	60	1540
2"	69	6	60	1885
2 1/2"	81	6	60	2226
3"	94	6	60	2758
4"	122	6	60	4020

STEAM 170

CLOTHED STEAM

165 °C saturated steam resistant EPM rubber product, steam evacuation works, general industrial use.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	24	7	70	322
5/8"	28	7	70	456
3/4"	31	7	70	525
1"	37	7	70	610
1 1/4"	46	7	70	942
1 1/2"	53	7	70	1166
1 3/4"	60	7	70	1400
2"	67.5	7	70	1747
2 1/2"	81	7	70	2229
3"	98	7	70	3312
4"	124	7	70	4443

GEYSER-2A

STEEL WIRE BRAIDED STEAM

TS EN 150 6134 TYPE 2 CLASS A
EPM rubber made of saturated steam resistant up to 210 C, steam evacuation works, refineries, rolling mills, chemical industry, shipyards.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	25	18	180	530
5/8"	30	18	180	750
3/4"	33	18	180	780
1"	40	18	180	1025
1 1/4"	48	18	180	1410
1 1/2"	54	18	180	1775
2"	69	18	180	2580
2 1/2"	81	18	180	3160

STEAM-SW

STEEL WIRE BRAIDED STEAM

BS 5342 TYPE 2 CLASS A
EPM rubber product resistant to saturated steam up to 200 C, steam discharge works, refineries, rolling mills, chemical industry, shipyards.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	24	17	170	485
5/8"	27	17	170	555
3/4"	32	17	170	720
1"	38.5	17	170	955
1 1/4"	46	17	170	1265
1 1/2"	52	17	170	1580
2"	67	17	170	2365
2 1/2"	79.5	17	170	2970

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

STEAM GF

GLASS FIBER STEAM

Made of EPDM rubber, which is resistant to steam saturated to 165 C, in all types of steam circuits and in high-temperature environments (Outdoor temperature up to 600 C)



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	24	7	70	410
5/8"	30	7	70	650
3/4"	33	7	70	710
1"	39.5	7	70	820
1 1/4"	47	7	70	1145
1 1/2"	53	7	70	1345
1 3/4"	60	7	70	1570
2"	67.5	7	70	1970
2 1/2"	81	7	70	2510
3"	98	7	70	3660

HEAT RADIATOR

HOT WATER

TS 548 TYPE 2

Heat-resistant EPDM rubber in internal combustion engine cooling systems and hot water circulation.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	19	4	12	215
5/8"	22	4	12	260
3/4"	25	4	12	302
7/8"	28	4	12	343
1"	32	4	12	432
1 1/8"	34.5	4	12	472
1 1/4"	40	4	12	636
1 3/8"	43	4	12	690
1 1/2"	47	4	12	845
1 3/4"	54	4	12	1050
2"	60	4	12	1182
2 1/4"	67	4	12	1405
2 1/2"	73.5	4	12	1490
2 3/4"	80	4	12	1630
3"	86	4	12	1765
3 1/2"	100	4	12	2065
4"	111.5	4	12	2300

HOT WATER LONG

FLAT TOP

TS-548 TYPE 2

Heat-resistant EPDM rubber product in internal combustion engine cooling systems and hot water circulation.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	12	4	12	115
5/16"	14	4	12	140
3/8"	16	4	12	165
1/2"	20	4	12	260
5/8"	23	4	12	290
3/4"	27	4	12	390

HOT WATER LONG

FLAT TOP

Made of water-resistant EPDM rubber, in internal combustion engine cooling systems and in hot water circulation.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	12	5	15	115
5/16"	14	5	15	140
3/8"	16	5	15	165
1/2"	20	5	15	260
5/8"	23	5	15	290
3/4"	27	5	15	390

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

COROSIVE MATERIAL HOSES

SAND

SANDBLASTING TRANSMITTER

TS EN ISO 3861

Wear-resistant conductive natural rubber, metal sheet, stone, concrete such as sand spraying and polishing works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1"	39	12	36	813
1 1/4"	48	12	36	1160
1 1/2"	56	12	36	1531
1 3/4"	63	12	36	1820
2"	69	12	36	2030
2 1/2"	82	12	36	2626
2 3/4"	90	12	36	2920
3"	96	12	36	3090

SAND

SANDBLASTING RECEIVER-TRANSMITTER

EXCEED TS EN ISO 3861

Wear-resistant conductive natural rubber, metal sheet, stone, concrete such as sand spraying and polishing works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1"	41	12	36	1115
1 1/4"	50	12	36	1445
1 1/2"	58	12	36	1765
1 3/4"	65	12	36	2420
2"	71	12	36	2440
2 1/2"	84	12	36	2975
2 3/4"	92	12	36	3250
3"	98	12	36	3610

CEMENT

CEMENT MAKER

Wear-resistant conductive natural rubber products, dust, sand, cement, gypsum in the transportation and pouring of materials such as cast.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1"	37	10	30	622
1 1/4"	44	10	30	817
1 1/2"	50	10	30	945
2"	64.5	10	30	1421
2 1/2"	77	10	30	1733
3"	90	10	30	2090
4"	118	10	30	3252
5"	146	10	30	4840
6"	172	10	30	6000
8"	225	10	30	8705

CEMENT SD

CEMENT BUYER - GIVER

Wear-resistant conductive natural rubber products, dust, sand, cement, gypsum in the process of transportation and pouring of materials such as



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1"	39	10	30	880
1 1/4"	45	10	30	1045
1 1/2"	52	10	30	1395
2"	66	10	30	1975
2 1/2"	78.5	10	30	2315
3"	92	10	30	3117
4"	120	10	30	4550
5"	149	10	30	6697
6"	174.5	10	30	8807
8"	229	10	30	13690

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

SILOBAS

SILOBAS

Abrasion resistant conductive natural rubber products, trucks and silos from all kinds of dry cement, corrosive dust, lime materials in the transportation works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
2"	60.4	5	15	960
2 1/2"	7	5	15	1175
3"	86	5	15	1392
3 1/2"	100	5	15	1770
4"	112	5	15	2025
4"	115	5	15	2550
4"	117	5	15	3177
5"	137	5	15	3276
6"	164	5	15	3414
8"	215	5	15	4660

CONCRETE TIP 85

CONCRETE END WITH GLAND

Abrasion resistant conductive material and CBR rubber in all kinds of ready-mixed concrete pumping and pouring works.



ID	SIZE	SINGLE END FITTING	TWO FITTINGS
inch	mt	€/Piece	€/Piece
4"	1.5		
4"	2		
4"	3		
4"	4		
4"	5		
4"	6		
5"	1.5		
5"	2		
5"	3		
5"	4		
5"	5		
5"	6		

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

FOOD HOSES

SPRING D10

DRINKING WATER DISPENSER

FDA COMPLIANT

White synthetic rubber product that does not impair the properties of drinking water and complies with international food specifications, in drinking water stations and drinking water transports.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	22	10	30	385
5/8"	26	10	30	509
3/4"	30	10	30	634
1"	37	10	30	820
1 1/4"	44	10	30	1080
1 1/2"	5	10	30	1365
2"	65	10	30	1910
2 1/2"	77.5	10	30	2330
3"	92	10	30	3030
4"	117.5	10	30	3955

SPRING SD10

DRINKING WATER TRANSMITTER

FDA COMPLIANT

White synthetic rubber products that do not impair the properties of drinking water and comply with international food specifications are produced in drinking water stations and drinking water transports..



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	24	10	30	540
5/8"	28	10	30	650
3/4"	31	10	30	730
1"	38	10	30	984
1 1/4"	45	10	30	1260
1 1/2"	52	10	30	1690
2"	66	10	30	2335
2 1/2"	78.5	10	30	2860
3"	93	10	30	3805
4"	118.5	10	30	4835

CREAM D/10

MILK & VEGETABLE FAT TRANSMITTER

FDA COMPLIANT

In the transportation of white synthetic rubber products, milk, vegetable oils and fatty liquids that do not disrupt the properties of the transported substance and comply with international food requirements,



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	24	10	30	500
5/8"	28	10	30	625
3/4"	31	10	30	705
1"	38	10	30	955
1 1/4"	45	10	30	1225
1 1/2"	52	10	30	1650
2"	66	10	30	2285
2 1/2"	78.5	10	30	2797
3"	93	10	30	3735
4"	118.5	10	30	4725

CREAM SD/10

MILK & VEGETABLE FAT INVERTER-TRANSMITTER

FDA COMPLIANT

In the transportation of white synthetic rubber products, milk, vegetable oils and fatty liquids that do not disrupt the properties of the transported substance and comply with international food requirements,



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	22	10	30	373
5/8"	26	10	30	495
3/4"	30	10	30	613
1"	3	10	30	793
1 1/4"	44	10	30	1048
1 1/2"	51	10	30	1314
2"	65	10	30	1835
2 1/2"	77.5	10	30	2269
3"	92	10	30	2928
4"	117.5	10	30	3825

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

STEAM-DW



FOOD STEAM

FDA COMPLIANT

Suitable for food, steam-resistant white special synthetic rubber product, boilers etc. in all kinds of food industries are temperature resistant up to 165 C in steam washing works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	30	7	70	595
1"	37	7	70	684
1 1/4"	44	7	70	1070
1 1/2"	51	7	70	1343
2"	65	7	70	1968
2 1/2"	77.5	7	70	2504
3"	92	7	70	3660
4"	117.5	7	70	4825

STEAM-DW S-D



FOOD STEAM RECEIVER-TRANSMITTER

FDA COMPLIANT

Suitable for food, steam-resistant white special synthetic rubber product, boilers etc. in all kinds of food industries are temperature resistant up to 165 C in steam washing works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	32	7	70	686
1"	38	7	70	850
1 1/4"	47	7	70	1124
1 1/2"	55	7	70	1734
2"	67	7	70	2200
2 1/2"	83	7	70	3170
3"	100	7	70	4681
4"	126	7	70	6117

MEY D/10



BEER WINE TRANSMITTER

FDA COMPLIANT

In the transportation works of white EPDM rubber products, beer, wine, mineral water, fruit juices, etc. that do not disrupt the properties of the transported material and comply with international food specifications.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	30	10	30	556
1"	37	10	30	719
1 1/4"	44	10	30	945
1 1/2"	51	10	30	1186
2"	65	10	30	1657
2 1/2"	77.5	10	30	2078
3"	92	10	30	2680
4"	117.5	10	30	3544

MEY SD/10



BEER WINE BUYER-DONOR

FDA COMPLIANT

In the absorption and transportation works of white EPDM rubber, which does not deteriorate the properties of the transported substance and complies with international food requirements, beer, wine, mineral water, fruit juices, etc.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	30	10	30	593
1"	37	10	30	801
1 1/4"	44	10	30	1029
1 1/2"	51	10	30	1430
2"	65	10	30	1981
2 1/2"	77.5	10	30	2244
3"	92	10	30	3285
4"	117.5	10	30	4173

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m


HOSES

An Eaton Brand

FUEL HONES

PUMP/L

FUEL PUMP TOP FLAT.

TS EN 1360 / TYPE 1

Synthetic nitrile rubber products are used in the distribution of fuel from pumps to transport vehicles at service stations.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	21.5	16	48	295
5/8"	26	16	48	425
3/4"	29	16	48	475
1"	36.5	16	48	690

BARREL/16

FUEL PUMP TOP WINDING

TS EN 1360 / TYPE 1

Synthetic nitrile rubber products, gasoline, diesel, fuel oil transportation works with aromatic content up to 50%




ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	21.5	16	48	342
5/8"	26	16	48	480
3/4"	30	16	48	530
1"	38	16	48	740
1 1/4"	45	16	48	1100

FOSSIL D/16

FUEL TRANSMITTER

TS 9464 EN 1761 / TYPE D

Synthetic nitrile rubber products, gasoline, diesel, fuel oil transportation works with aromatic content up to 50%.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	31	16	48	625
1"	3	16	48	730
1 1/4"	44	16	48	935
1 1/2"	51	16	48	1192
1 3/4"	59	16	48	1542
2"	67	16	48	1960
2 1/2"	79	16	48	2237
2 3/4"	84	16	48	2577
3"	92	16	48	2727
4"	118	16	48	3710

FOSSIL SD/16

FUEL RECEIVER-TRANSMITTER

TS 9464 EN 1761 / TYPE SD

Synthetic nitrile rubber products, up to 50% aromatic rate gasoline, diesel, fuel oil absorption and compression works.




ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	31	16	48	672
1"	3	16	48	810
1 1/4"	44	16	48	1035
1 1/2"	51	16	48	1375
2"	67	16	48	2215
2 1/2"	7	16	48	2625
2 3/4"	84	16	48	2982
3"	92	16	48	3375
4"	118	16	48	4415

FUEL D/10

FUEL TRANSMITTER

Synthetic nitrile rubber products, gasoline, diesel, fuel oil transportation works with aromatic content up to 50%.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	28	10	30	444
1"	35	10	30	574
1 1/4"	42	10	30	716
1 1/2"	48	10	30	864
2"	62	10	30	1276
2 1/2"	75	10	30	1632
3"	88	10	30	1984
4"	116	10	30	3193

FUEL SD/10

FUEL RECEIVER-TRANSMITTER

Synthetic nitrile rubber products, up to 50% aromatic rate gasoline, diesel, fuel oil absorption and compression works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	29	10	30	535
1"	36	10	30	707
1 1/4"	43	10	30	914
1 1/2"	49	10	30	1155
2"	63	10	30	1644
2 1/2"	76	10	30	2129
3"	89	10	30	2768
4"	117	10	30	4035

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

LPG-D

LPG TRANSMITTER

TS EN 1762 TYPE D-Ω

LPG resistant black conductive synthetic nitrile rubber product, LPG transfer works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	23	25	100	392
5/8"	26	25	100	466
3/4"	31	25	100	630
1"	38	25	100	835
1 1/4"	45	25	100	1051
1 1/2"	52	25	100	1210
2"	67	25	100	1832

LPG-SD

LPG RECEIVER-TRANSMITTER

TS EN 1762 TYPE SD-Ω

LPG resistant black conductive synthetic nitrile rubber product, LPG absorption and transfer works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/2"	23	25	100	441
5/8"	26	25	100	519
3/4"	31	25	100	681
1"	38	25	100	902
1 1/4'	45	25	100	1174
1 1/2'	52	25	100	1504
2"	67	25	100	2196

FUEL HOSE

TEXTILE SUPPLEMENTARY FUEL

Oil- and diesel-resistant, black plain synthetic nitrile rubber product, grease for fuel evacuation in internal combustion engines and general lubrication work.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/16"	10.5	10	30	106
1/4"	12	10	30	115
5/16"	14	10	30	145
3/8"	16	10	30	170
1/2"	20	10	30	265
5/8"	24	10	30	350

AIRCRAFT AERO-C

AIRPLANE TIME CONSUMING

TS EN ISO 1825 TYPE C

Made of black conductive synthetic nitrile rubber, resistant to oils and fuel oils, fuels with an aromatic content of up to 30% are supplied to airplanes on the ground.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	29	20	80	522
1"	38	20	80	840
1 1/4"	45	20	80	1000
1 1/2"	51	20	80	1155
2"	65	20	80	1710
2 1/2"	80	20	80	2070
3"	92	20	80	2580

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

CHEMICAL SUBSTANCE HOSES

KEMİD/10EPDM

CHEMICAL SUBSTANCE TRANSMITTER EPDM

Chemical resistant black, EPDM rubber product, various acids, base and chemicals, marine and industrial water evacuation works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	29	10	40	475
1"	35	10	40	600
1 1/4"	43	10	40	855
1 1/2"	49	10	40	985
2"	64	10	40	1545
2 1/2"	77	10	40	1905
3"	90	10	40	2365
4"	116	10	40	3110

KEMİSD/10 EPDM

CHEMICAL SUBSTANCE IMPORTER-EXPORTER EPDM

Chemical resistant black, EPDM rubber product, various acids, bases and chemicals, marine and industrial water drainage and absorption works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	30	10	40	605
1"	36	10	40	720
1 1/4"	44	10	40	1020
1 1/2"	51	10	40	1355
2"	66	10	40	2080
2 1/2"	79	10	40	2700
3"	92	10	40	3240
4"	118	10	40	4050

KEMİD/10CSM

CHEMICAL SUBSTANCE EXPORTER CSM

High density and corrosive chemical resistant black CSM rubber product, in chemical industry high density acid, base and abrasive chemical discharge works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	30	10	40	455
1"	36	10	40	575
1 1/4"	45	10	40	835
1 1/2"	51	10	40	965
2"	65	10	40	1475
2 1/2"	79	10	40	1875
3"	92	10	40	2290
4"	118	10	40	3160

KEMİSD/10 CSM

CHEMICAL SUBSTANCE IMPORTER-EXPORTER CSM

High density and corrosive chemical resistant black CSM rubber product, in the chemical industry for high-density acid, base and abrasive chemical absorption and evacuation.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	31	10	40	590
1"	37	10	40	700
1 1/4"	45	10	40	1005
1 1/2"	52	10	40	1345
2"	67	10	40	2025
2 1/2"	80	10	40	2630
3"	93	10	40	3190
4"	120	10	40	4255

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

KEMİD/10XLPE

ACID SOLVENT AND CHEMICAL AGENT TRANSMITTER

High density and corrosive chemicals, solvents resistant transparent XLPE product, in the chemical industry in the discharge of high density acid, alcohol, special solvents, etc.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	30	10	40	545
1"	36	10	40	670
1 1/4"	45	10	40	1017
1 1/2"	51	10	40	1175
2"	65	10	40	1677
2 1/2"	79	10	40	2195
3"	92	10	40	2700
4"	118	10	40	3605

KEMİSD/10XLPE

ACID SOLVENT AND CHEMICAL SUBSTANCE ACCEPTOR-TRANSMITTER

High density and corrosive chemicals, solvents resistant transparent XLPE products, in the chemical industry in the work of suction and discharge of high-density acid, alcohol, special solvents, etc.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	31	10	40	670
1"	37	10	40	815
1 1/4"	45	10	40	1125
1 1/2"	52	10	40	1460
2"	67	10	40	2260
2 1/2"	80	10	40	2820
3"	93	10	40	3425
4"	120	10	40	5290

KEMİD/10UHMW-PE

ACID SOLVENT AND CHEMICAL AGENT TRANSMITTER

Made of transparent UHMW-PE, resistant to all common chemicals, in the chemical industry in the discharge of high-density acid, alcohol, solvents with high aromatic value, petroleum products, etc.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	30	10	40	563
1"	36	10	40	662
1 1/4"	45	10	40	1023
1 1/2"	51	10	40	1181
2"	65	10	40	1742
2 1/2"	79	10	40	2224
3"	92	10	40	2694
4"	118	10	40	3752

KEMİSD/10UHMW-PE

ACID SOLVENT AND CHEMICAL SUBSTANCE ACCEPTOR-TRANSMITTER

Made of transparent UHMW-PE, resistant to all common chemicals, in the chemical industry high-density acid, alcohol, high aromatic value solvents, petroleum products, etc. in the absorption and finishing works.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	31	10	40	690
1"	37	10	40	815
1 1/4"	45	10	40	1120
1 1/2"	52	10	40	1495
2"	67	10	40	2275
2 1/2"	80	10	40	2775
3"	93	10	40	3315
4"	120	10	40	4880

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

KEMi D/16UHMW-PE

ACID SOLVENT AND CHEMICAL AGENT TRANSMITTER

TS EN 12115

Made of transparent UHMW-PE, resistant to all common chemicals, in the chemical industry in the discharge of high-density acid, alcohol, high aromatic value solvents, petroleum products, etc.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	30	16	64	612
1"	36	16	64	755
1 1/4"	45	16	64	941
1 1/2"	51	16	64	1196
2"	65	16	64	1939
2 1/2"	79	16	64	2301
3"	92	16	64	2747
4"	118	16	64	3785

KEMi SD/16UHMW-PE

ACID SOLVENT AND CHEMICAL SUBSTANCE ACCEPTOR-TRANSMITTER

TS EN 12115

Made of transparent UHMW-PE, resistant to all common chemicals, in the chemical industry in the absorption and discharge of high-density acid, alcohol, high aromatic value solvents, petroleum products, etc.



ID	OD	OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
3/4"	31	16	64	674
1"	37	16	64	826
1 1/4"	45	16	64	1044
1 1/2"	52	16	64	1393
2"	67	16	64	2245
2 1/2"	80	16	64	2620
3"	93	16	64	3223
4"	120	16	64	4568

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m