






1 Steel Wire Braid - High Temperature +135 °C

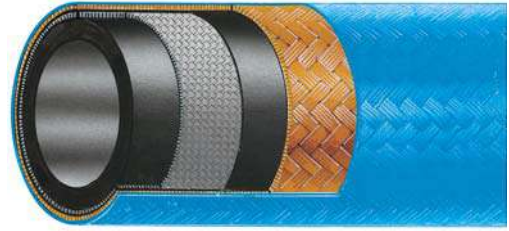

 TUBE : HIGH TEMPERATURE HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.
 REINFORCEMENT : SYNTHETIC TEXTILE AND 1 HIGH TENSILE STEEL WIRE BRAID.
 COVER : OIL AND WEATHER RESISTANT SYNTHETIC RUBBER IMPREGNATED SYNTHETIC BRAID.
 APPLICATION : FOR LOW-MEDIUM PRESSURE HYDRAULIC SYSTEMS IN INDUSTRY, COMPRESSORS AND MINING WHERE OPERATING TEMPERATURES ARE UP TO 150 °C

 SEELE : SPEZIELLES, SYNTHETISCHES GUMMI, BESTÄNDIG GEGEN HYDRAULIKÖLE MIT HOHEN ANWENDUNGSTEMPERATUREN
 EINLAGE : 1 GEFLECHTEINLAGE AUS HOCHZUGFESTEM STAHLDRAHT MIT ZUSÄTZLICHER TEXTILEINLAGE
 DECKE : SPEZIELLES, SYNTHETISCHES GUMMI, ÖL-, ABRIEB- UND WITTERUNGSBESTÄNDIG
 ANWENDUNG : GEEIGNET ALS NIEDER- UND MITTELDRUCK HYDRAULIKSCHLAUCH IN DER INDUSTRIE, KOMPRESSOREN UND BERGBAU. EINSATZFÄHIG BIS ZU 150 °C BETRIEBSTEMPERATUR

 SOTTOSTRATO : GOMMA SPECIALE SINTETICA RESISTENTE AI FLUIDI IDRAULICI.
 RINFORZO : INSERZIONI TESSILI E 1 TRECCIA IN ACCIAIO AD ALTA TENACITÀ.
 COPERTURA : TRECCIA IN TESSILE IMPREGINATO DI GOMMA SINTETICA RESISTENTE AGLI OLI ED AGENTI ATMOSFERICI.
 IMPIEGO : PER SISTEMI A PRESSIONE BASSA-MEDIA CHE IMPIEGANO FLUIDI IDRAULICI IN INDUSTRIA, COMPRESSORI MINERARIA AD ALTA TEMPERATURA FINO A 150 °C

 TUBE : CAOUTCHOUC SYNTHETIQUE SPECIAL RESISTANT AUX HUILES HYDRAULIQUES.
 RENFORCEMENT : INSERTION TEXTILE ET 1 TRESSE D'ACIER TRES RESISTANTE.
 REVETEMENT : TRESSE TEXTILE IMPREGNEE DE CAOUTCHOUC SYNTHETIQUE SPECIAL RESISTANT A L'ABRASION, AUX HUILES, CARBURANTS ET AGENTS ATMOSPHERIQUES.
 APPLICATION : POUR LES SYSTEMES HYDRAULIQUES A BASSE ET MOYENNE PRESSION DANS L'INDUSTRIE, COMPRESSEURS, L'EXPLOITATION MINIERE OÙ ON EXIGE UNE TEMPERATURE JUSQU'A 150 °C


Dash Size	ID		OD	WP		BP		BR/r	W	L
	inch	mm	mm	bar	psi	bar	psi	mm	g/m	m
-04	3/16"	4.8	12.9	210	3045	1100	15950	75	255	>10
-05	1/4"	6.4	14.5	210	3045	1000	14500	85	295	>10
-06	5/16"	8	16.8	157	2277	800	11600	100	370	>10
-08	13/32"	10.3	19.1	140	2030	700	10150	115	430	>10
-10	1/2"	12.7	22.9	122	1769	600	8700	140	590	>10
-12	5/8"	16	27.1	105	1523	520	7540	165	735	>10
-16	7/8"	22.2	30.8	56	812	380	5510	185	725	>10
-20	1 1/8"	28.6	37.6	43	624	300	4350	230	945	>10
-24	1 3/8"	34.9	44.5	35	508	250	3625	265	1170	max. 46
-32	1 13/16"	46	56.4	24	348	200	2900	335	1420	max. 46
-40	2 3/8"	60	73	24	348	150	2175	610	2355	max. 46
-48	3"	76.2	90.5	14	203	100	1450	840	3195	max. 46



-50°C / +135°C (+150°C DISCONTINUOUS)
 -58°F / +275°F (+302°F DISCONTINUOUS)

MARKING / BESCHRIFTUNG / MARCATURA / MARQUAGE: **TRANSFER TAPE OR INK JET**

SEL **ULTIMATE** SAE 100 R5 (**") (DN ** mm) Max. W.P. *** Bar / **** PSI 135°C 

NORMS NORMEN NORME NORMES	SAE 100 R5 ISO 1307	COLOUR FARBEN COLORI COULEUR	
------------------------------------	------------------------	---------------------------------------	--