


4 Steel Wire Spiral



TUBE : MINERAL, ESTER BASED OIL, VEGETABLE, AND GLYCOL BASED HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.
 REINFORCEMENT : 4 HIGH TENSILE STEEL SPIRAL.
 COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER
 APPLICATION : FOR HYDRAULIC SYSTEMS WITH HIGH PEAK PRESSURES AND ARDUOUS OPERATING CONDITIONS.

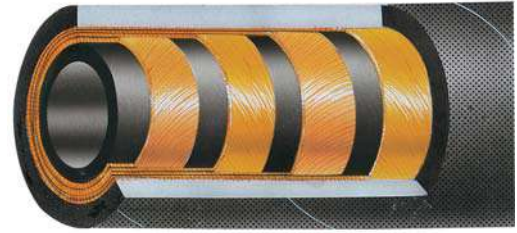

SEELE : SPEZIELLES, SYNTETHISCHES GUMMI, BESTÄNDIG GEGEN HYDRAULIKÖLE AUF MINERAL-, ESTER BASIS ÖL, GLYKOL- UND PFLANZLICHER BASIS
 EINLAGE : 4 SPIRALEINLAGEN AUS HOCHZUGFESTEM STAHLDRAHT
 DECKE : SPEZIELLES, SYNTETHISCHES GUMMI, ÖL-, ABRIEB- UND WITTERUNGSBESTÄNDIG
 ANWENDUNG : GEEIGNET ALS HOCHDRUCKSCHLAUCH FÜR HYDRAULIKSYSTEME IN SCHWEREN ARBEITSUMGEBUNGEN



SOTTOSTRATO : GOMMA SPECIALE SINTETICA RESISTENTE AI FLUIDI IDRAULICI CON BASE DI OLIO MINERALE BASE ESTERE E GLICOLI.
 RINFORZO : 4 SPIRALI IN ACCIAIO AD ALTISSIMA RESISTENZA.
 COPERTURA : GOMMA SPECIALE SINTETICA RESISTENTE AGLI OLI, ABRASIONE ED AGENTI ATMOSFERICI.
 IMPIEGO : PER IMPIANTI IDRAULICI CON PICCHI DI PRESSIONE SUPERIORE ALLO STANDARD. PER USI DURI.



TUBE : CAOUTCHOUC SYNTHETIQUE SPECIAL RESISTANT AUX FLUIDES HYDRAULIQUES A BASE D'HUILES MINERALES, BASE D'ESTER, GLICOLES ET VEGETALES
 RENFORCEMENT : 4 NAPPE SPIRALES EN FIL D'ACIER HAUTE RESISTANCE.
 REVETEMENT : CAOUTCHOUC SYNTHETIQUE SPECIAL RESISTANT A L'ABRASION, AUX HUILES, CARBURANTS ET AGENTS ATMOSPHERIQUES.
 APPLICATION : POUR LES SYSTEMES HYDRAULIQUES AVEC DES PICS DE PRESSION SUPERIEURE, DANS DES CONDITIONS SEVERES.

Dash Size	ID		ROD	OD	WP		BP		BR/r	W	L
	inch	mm	mm	mm	bar	psi	bar	psi	mm	g/m	m
-04	1/4"	6.4	14.6	17.6	450	6525	1800	26100	150	565	> 3
-06	3/8"	9.5	17.5	21.2	445	6453	1780	25810	180	730	> 3
-08	1/2"	12.7	20.3	24.4	415	6018	1660	24070	230	865	> 3
-10	5/8"	16	23.8	28	350	5075	1400	20300	250	1035	> 3
-12	3/4"	19	28.2	32	350	5075	1400	20300	300	1485	Max. 61
-16	1"	25.4	35.1	39.1	280	4060	1120	16240	340	1900	Max. 61

OPTIONS / OPTIONEN / OPZIONI / OPTIONS



-40°C / +100°C
 -40°F / +212°F

(+125°C DISCONTINUOUS)
 (+257°F DISCONTINUOUS)

MARKING / BESCHRIFTUNG / MARCATURA / MARQUAGE: **TRANSFER TAPE OR EMBOSSED**



NORMS	DIN 20023 PART 1 TYPE 4SP	COLOUR	
NORMEN	EN 856 4SP	FARBEN	
NORME	TS 10548 / EN 856 4 SP	COLORI	
NORMES	ISO 1307	COULEUR	