


MEGASYS™ WIRE AND TEXTILE BRAID HYDRAULIC HOSE



GTH

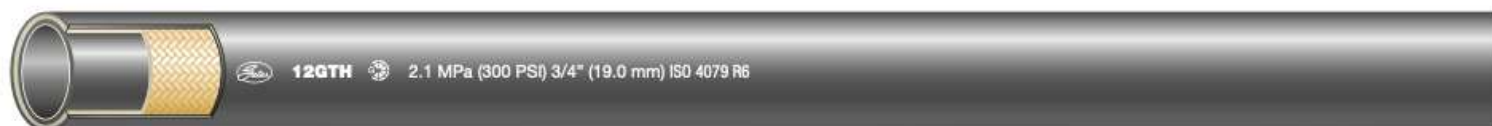

-size	DN	"	"	mm	PSI	MPa	PSI	MPa	mm	kg/100m	REF.
-4	6	1/4	0.50	12.7	400	2.8	1600	11.2	65	13	4GTH
-5	8	5/16	0.56	14.3	400	2.8	1600	11.2	75	15	5GTH
-6	10	3/8	0.63	15.9	400	2.8	1600	11.2	75	17	6GTH
-8	12	1/2	0.78	19.8	400	2.8	1600	11.2	100	23	8GTH
-10	16	5/8	0.91	23.0	350	2.4	1400	9.6	125	28	10GTH
-12	19	3/4	1.06	26.9	300	2.1	1200	8.4	150	38	12GTH
-16	25	1	1.32	33.5	250	1.7	1000	6.9	165	47	16GTH

RECOMMENDED FOR High-temperature, low pressure hydraulic oil lines, heavy-duty transmission oil cooler lines and glycol anti-freeze solutions.

TUBE NBR (Nitrile) based.

REINFORCEMENT One fibre braid.

COVER CR (Chloroprene) based.

TEMPERATURE RANGE -40°C to +135°C constant and +150°C intermittent.
For water emulsions, etc. see Engineering and technical data page 292.

STANDARDS Meets ISO 4079 R6 / EN 854 R6 / SAE 100R6 (-4 to -12).

COUPLINGS MegaCrimp™.