


4 - 6 Steel Wire Spiral

X-Flexibility



TUBE : MINERAL, VEGETABLE, AND GLYCOL BASED HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.
 REINFORCEMENT : 4 OR 6 HIGH TENSILE STEEL SPIRAL.
 COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER
 APPLICATION : FOR HYDRAULIC SYSTEMS WITH HIGH PEAK PRESSURES AND ARDUOUS OPERATING CONDITIONS WITH HIGH FLEXIBILITY.

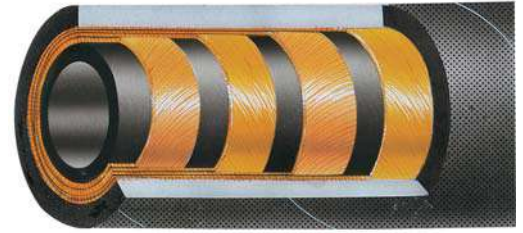

SEELE : SPEZIELLES, SYNTETHISCHES GUMMI, BESTÄNDIG GEGEN HYDRAULIKÖLE AUF MINERAL-, GLYKOL- UND PFLANZLICHER BASIS
 EINLAGE : WAHLWEISE 4 ODER 6 SPIRALEINLAGEN AUS HOCHZUGFESTEM STAHLDRAHT
 DECKE : SPEZIELLES, SYNTETHISCHES GUMMI, ÖL-, ABRIEB- UND WITTERUNGSBESTÄNDIG
 ANWENDUNG : GEEIGNET ALS HOCHDRUCKSCHLAUCH FÜR HYDRAULIKSYSTEME IN SCHWEREN ARBEITSUMGEBUNGEN, SEHR FLEXIBEL



SOTTOSTRATO : GOMMA SPECIALE SINTETICA RESISTENTE AI FLUIDI IDRAULICI CON BASE DI OLIO MINERALE E GLICOLI.
 RINFORZO : 4 O 6 SPIRALI IN ACCIAIO AD ALTISSIMA RESISTENZA.
 COPERTURA : GOMMA SPECIALE SINTETICA RESISTENTE AGLI OLI, ABRASIONE ED AGENTI ATMOSFERICI.
 IMPIEGO : PER IMPIANTI IDRAULICI CON PICCHI DI PRESSIONE SUPERIORE ALLO STANDARD. PER USI DURI. ECCELLENTE FLESSIBILITÀ.



TUBE : CAOUTCHOUC SYNTHETIQUE SPECIAL RESISTANT AUX FLUIDES HYDRAULIQUES A BASE D'HUILES MINERALES, GLICOLLES ET VEGETALES
 RENFORCEMENT : 4 OU 6 NAPPE SPIRALES EN FIL D'ACIER HAUTE RESISTANCE.
 REVETEMENT : CAOUTCHOUC SYNTHETIQUE SPECIAL RESISTANT A L'ABRASION, AUX HUILES, CARBURANTS ET AGENTS ATMOSPHERIQUES.
 APPLICATION : POUR LES SYSTEMES HYDRAULIQUES AVEC DES PICS DE PRESSION SUPERIEURE, DANS DES CONDITIONS SEVERES. ECCELLENTE FLEXIBILITE.

ID		ROD		OD		WP		BP		BR/r	W	L
Dash Size	inch	mm	mm	mm	bar	psi	bar	psi	mm	g/m	m	
-06	3/8"	9.5	17.5	20.6	420	6090	1680	24360	110	745	> 10	
-08	1/2"	12.7	20.2	23.5	420	6090	1680	24360	120	885	> 10	
-10	5/8"	16	23.8	27	420	6090	1680	24360	140	1060	> 10	
-12	3/4"	19	28.2	32	420	6090	1680	24360	170	1470	> 10	
-16	1"	25.4	35.1	38.1	420	6090	1680	24360	220	2015	> 10	
-20	1 1/4"	31.8	46.3	49.3	420	6090	1680	24360	265	3785	Max. 61	

OPTIONS / OPTIONEN / OPZIONI / OPTIONS



-40°C / +120°C (+125°C DISCONTINUOUS)
 -40°F / +248°F (+257°F DISCONTINUOUS)

MARKING / BESCHRIFTUNG / MARCATURA / MARQUAGE: **TRANSFER TAPE OR EMBOSSED**

SEL POWERSTREAM X-6000 (**") (DN ** mm) Max. W.P. *** Bar / **** PSI MSHA IC-84/41

NORMS NORMEN NORME NORMES	ISO 1307	COLOUR FARBEN COLORI COULEUR	
------------------------------------	----------	---------------------------------------	--