


Non-Toxic Steel Spiral

(Close Pitch)



- CONSTRUCTION** : STRONG, VERY FLEXIBLE AND SMOOTH NON-TOXIC, TRANSPARENT PLASTICIZED PVC.
SHOCK RESISTANT CLOSE PITCH GALVANISED STEEL SPIRAL WIRE.
CRUSHING, ABRASION AND WEATHER RESISTANT, SMOOTH OUTSIDE.
- APPLICATION** : FOR SUCTION AND DELIVERY OF WATER, MINERAL WATER, FRUIT JUICES, LIQUIDS ETC. IN SHIPYARDS, INDUSTRIES, BUILDINGS,
AGRICULTURAL AND INDUSTRIAL MACHINERIES.

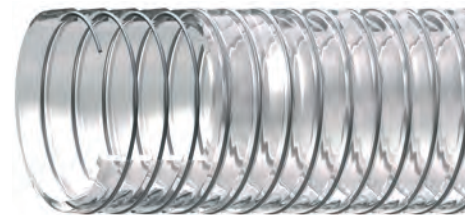

- KONSTRUKTION** : STABILER, HOCHFLEXIBLER, TRANSPARENTER, GLATTER UND TOXIDENFREI, PLASTIFIZIERTER PVC,
VERSTÄRKUNGSSPIRALE AUS SCHLAG-UND DRUCKFESTE - GALVANISIERTE STAHLDRAHTSPIRALE MIT EINER BESONDEREN ENGEN STEIGUNG.
ÄUSSERST STRAPAZIERFÄHIGE, DRUCK-UND ABRIEBFESTE, WITTERUNGSBESTÄNDIGE GLATTE AUSSENDECKE.
- ANWENDUNG** : FÜR BE UND ENTLADEN VON WASSER, GETRÄNKEN, MINERALWASSER UND FRUCHTSÄFTEN; BESONDERS EINSETZBAR IM SCHIFFBAU, WERFTEN,
ENTWÄSSERUNGEN, SAUG PUMPEN, IN DER LEBENSMITTELINDUSTRIE, LANDWIRTSCHAFT UND BEI ARBEITSMASCHINEN.



- COSTRUZIONE** : MATERIALE LISCIO ED ATOSSICO IN PVC PLASTIFICATO, TRASPARENTE, LEGGERO E MOLTO FLESSIBILE.
SPIRALE DI RINFORZO IN ACCIAIO ZINCATO AD ANGOLO DIMINUITO, RESISTENTE AD URTO E ANTISCHIACCIAMENTO.
ESTERNA LISCIA, RESISTENTE A CARICHI, ABRASIONE E AGENTI ATMOSFERICI.
- IMPIEGO** : PER ASPIRAZIONE E MANDATA DI ACQUA MINERALI, LIQUIDI ALIMENTARI, SUCCI DI FRUTTA IN AGRICOLTURA, INDUSTRIA GENERALE E MARITTIMA.



- CONSTRUCTION** : TUYAU LISSE TRANSPARENT ET FLEXIBLE EN PVC SOUPLE NON TOXIQUE.
SPIRALE DE RENFORT A PAS COURT EN ACIER GALVANISE.
- APPLICATION** : ASPIRATION ET TRANSFERT LEGER DE LIQUIDES DANS LES RESEAUX D'ECOULEMENT, CAMIONS D'ASSAINISSEMENT, CHANTIERS NAVALS ET USINES
CHIMIQUES, DENREES ALIMENTAIRES ET BOISSONS.

ID		BP		VACUUM	BR/r	W	L
inch	mm	bar	psi	m/H ₂ O	mm	g/m	m
5/16"	8	36	522	9	20	150	30/50
3/8"	10	36	522	9	20	180	30/50
1/2"	12	36	522	9	25	190	30/50
	14	36	522	9	30	230	30/50
5/8"	16	36	522	9	30	260	30/50
	18	33	479	9	30	295	30/50
3/4"	20	30	435	9	30	340	30/50
1"	25	30	435	9	40	520	30/50
	30	27	392	9	45	630	30/50
1 1/4"	32	27	392	9	50	660	30/50
	35	27	392	9	55	750	30/50
1 1/2"	38	27	392	9	60	800	30
	40	27	392	9	60	950	30
	45	27	392	9	70	1150	30
2"	51	21	305	9	75	1330	30
	60	18	261	9	120	1850	30
2 1/2"	63	18	261	9	125	2000	30
	70	15	218	9	140	2300	30
3"	76	13	189	9	150	2600	30
	80	12	174	9	160	2750	30
	90	12	174	9	180	3100	30
4"	102	9	131	9	200	3700	30
	105	9	131	9	210	3850	30
	114	9	131	9	230	4500	30
5"	127	9	131	9	250	4700	30
6"	152	7	102	9	300	6900	30



- 5 °C / + 60 °C
+23 °F / +140 °F

OTHER COLOURS AND DIAMETERS AVAILABLE UPON REQUEST.
AUF ANFRAGE KÖNNEN VERSCHIEDENE FARBEN UND MASSE PRODUZIERT WERDEN.
DIVERSI COLORI E DIMENSIONI DISPONIBILI SU RICHIESTA.
D'AUTRES COULEURS ET DIAMETRES DISPONIBLES SUR DEMANDE.



NORMS NORMEN NORME NORMES	EEC DIRECTIVE 90/128 ISO 1307	MARKING BESCHRIFTUNG MARCATURA MARQUAGE	INK JET SEL BOSPHORUS +	COLOUR FARBEN COLORI COULEUR	
------------------------------------	----------------------------------	--	----------------------------	---------------------------------------	--