


Light Duty Non Toxic - PVC Braided

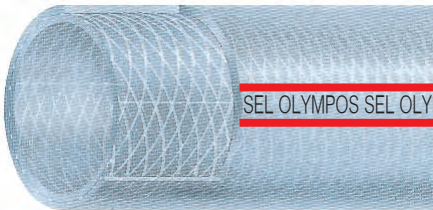

	TUBE REINFORCEMENT COVER APPLICATION	: NON-TOXIC TRANSPARENT PVC. : HIGH TENSILE SYNTHETIC TEXTILE . : ABRASION, OZONE AND WEATHER RESISTANT TRANSPARENT PVC ALLOWING EASY INSPECTION DURING SERVICE. : FOR LIGHT DUTY CONVEYING LIQUIDS, AIR, POWDERED FOODS, SALTS, LIGHT CHEMICALS.
	SEELE EINLAGEN DECKE ANWENDUNG	: TOXIDENFREI, TRANSPARENTER PVC. : HOCHFESTES SYNTHETISCHES TEXTILGEWEBE. : ABRIEBFESTER, OZON UND WITTERUNGSBESTÄNDIGER, TRANSPARENTER PVC. : FÜR LEICHTE VERWENDUNGEN JEDLICHER ARTEN VON BEWÄSSERUNGEN, ZUM DURCHLEITEN VON LUFT, SALZ, LEICHTE CHEMIKALIEN UND SÄUREN.
	SOTTOSTRATO RINFORZO COPERTURA IMPIEGO	: PVC ATOSSICO TRASPARENTE. : INSERZIONI TESSILI AD ALTA TENACITÀ. : PVC TRASPARENTE, RESISTENTE ALL'ABRASIONE, OZONO, ED AGENTI ATMOSFERICI. : PER SISTEMI DI PULITURA AUTOMATICI, INDICATORI DI LIVELLO, AREA COMPRESSA, INDUSTRIA ALIMENTARE.
	TUBE RENFORCEMENT REVETEMENT APPLICATION	: TUYAU LISSE TRANSPARENT EN PVC, NON TOXIQUE. : INSERTION TEXTILE HAUTE TENACITE. : LISSE, TRANSPARENT RESISTANTE A L'ABRASION ET LES AGENTS ATMOSPHERIQUES. : POUR LA DISTRIBUTION DE L'EAU, LIQUIDES ALIMENTAIRES, AIR, COMPRIME, LA PLUPART DES PRODUITS CHIMIQUES.

 ID		 OD	 WP		 BP		 W	 L
inch	mm	mm	bar	psi	bar	psi	g/m	m
1/4"	6	11	20	290	60	870	85	100
5/16"	8	13	20	290	60	870	105	100
3/8"	10	15	20	290	60	870	125	100
1/2"	13	18	15	218	45	653	150	100
5/8"	16	21	14	203	42	609	185	100
3/4"	19	25	13	189	39	566	270	100
1"	25	32	9	131	27	392	385	50

- 5 °C / + 60 °C
+23 °F / +140 °F

OTHER COLOURS AND DIAMETERS AVAILABLE UPON REQUEST.
AUF ANFRAGE KÖNNEN VERSCHIEDENE FARBEN UND MASSE PRODUZIERT WERDEN.
DIVERSI COLORI E DIMENSIONI DISPONIBILI SU RICHIESTA.
D'AUTRES COULEURS ET DIAMETRES DISPONIBLES SUR DEMANDE.

NORMS NORMEN NORME NORMES	EEC DIRECTIVE 90/128 ISO 1307	MARKING BESCHRIFTUNG MARCATURA MARQUAGE	INK JET SEL OLYMPOS LD	COLOUR FARBEN COLORI COULEUR	
------------------------------------	----------------------------------	--	---------------------------	---------------------------------------	--