


SPIRAL GUARDS

Spiral Guards



APPLICATION : PROTECTION SPIRAL FOR HOSE AND CABLES.

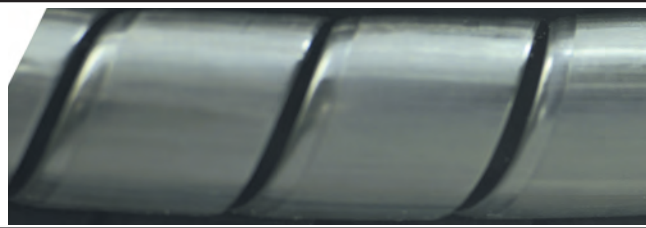

ANWENDUNG : SCHUTZWEDEL FÜR SCHLAUCH UND KABEL.



IMPIEGO : SPIRALE DI PROTEZIONE PER TUBI E CAVI.



APPLICATION : SPIRALE DE PROTECTION POUR TUYAUX ET CABLES.

Polyethylene Spiral Guards

ID	OD	Wall Thickness	Spiral Pitch	W	L
mm	mm	mm	mm	g/m	m
7,5	10	1,25	9	32	20
9,5	12	1,25	11	39	20
13	16	1,5	15	64	20
16	20	2	18	106	20
20	25	2,5	22,5	166	20
24	29	2,5	28	196	20
27	32	2,5	30	217	10
30	35	2,5	30	239	10
35	40	2,5	28	276	10
44	50	3	28	415	2
50	60	5	28	810	2
60	70	5	32	958	2
65	75	5	32	1032	2
75	85	5	35	1180	2
80	90	5	35	1252	2
100	110	5	35	1548	2

Polyamide Spiral Guards

ID	OD	Wall Thickness	Spiral Pitch	W	L
mm	mm	mm	mm	g/m	m
7,5	10	1,25	9	37	20
9,5	12	1,25	11	45	20
13	16	1,5	15	74	20
16	20	2	18	122	20
20	25	2,5	22,5	190	20
24	29	2,5	28	225	20
27	32	2,5	30	250	10
30	35	2,5	30	275	10
35	40	2,5	28	317	10
44	50	3	28	477	2
50	60	5	28	931	2
60	70	5	28	1083	2
65	75	5	32	1134	2
75	85	5	32	1295	2
80	90	5	35	1377	2
100	110	5	35	1700	2



- 20 °C / + 60 °C
- 4 °F / +140 °F



- 40 °C / +100 °C
- 40 °F / +212 °F

NORMS NORMEN NORME NORMES	ISO 1307	MARKING BESCHRIFTUNG MARCATURA MARQUAGE	COLOUR FARBEN COLORI COULEUR	
------------------------------------	----------	--	---------------------------------------	--

