


Steel Reinforced High Pressure Twin

Çelik Tel Örgülü Yüksek Basınç Dayanımlı İkiz



TUBE : HYDRAULIC OILS, AIR AND WATER BASED FLUIDS RESISTANT POLYESTER.
 REINFORCEMENT : HIGH TENSILE STEEL WIRE BRAID.
 COVER : OIL, ABRASION AND WEATHER RESISTANT POLYURETHANE.
 APPLICATION : FOR VERY HIGH PRESSURE HYDRAULIC SYSTEMS USED IN VARIOUS INDUSTRIES AND AGRICULTURE.
 FITTINGS : PRESSED.

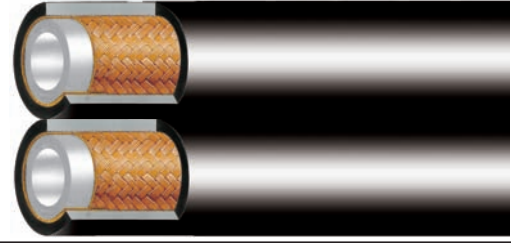

SEELE : BESTÄNDIGER POLYESTER GEGEN HYDRAULIKÖL, LUFT UND WASSER ENTHALTENDE FLÜSSIGKEITEN.
 EINLAGEN : HOCH REISSFESTES STAHLDRAGTGEFLECHT.
 DECKE : ÖL- UND WETTERBESTÄNDIGES, ABRIEFESTES POLYURETHAN.
 ANWENDUNG : GEEIGNET ALS HYDRAULIKSCHLAUCH FÜR LANDWIRTSCHAFT UND BAUMASCHINEN MIT HOHEM ARBEITSDRUCK.
 EINBAUD : PRESSARMATUR.



SOTTOSTRATO : POLIESTERE RESISTENTE AGLI OLII IDRAULICI E FLUIDI A BASE ACQUOSA ED ARIA.
 RINFORZO : TRECCA IN ACCIAIO AD ALTA TENACITÀ.
 COPERTURA : IN POLIURETANO ANTIABRASIONE, RESISTENTE ALL'OLIO ED AGLI AGENTI ATMOSFERICI.
 IMPIEGO : PER SISTEMI IDRAULICI AD ALTA PRESSIONE IN AGRICOLTURA ED INDUSTRIE.
 RACCORDI : PRESSATI.



ALT KAT : HİDROLİK YAĞLARA, HAVA VE SU BAZLI AKIŞKANLARA DAYANIKLI POLYESTER.
 TAKVİYE : YÜKSEK MUKAVEMETLİ ÇELİK TEL ÖRGÜ.
 ÜST KAT : YAĞ, AŞINMA VE HAVA ŞARTLARINA DAYANIKLI POLİÜRETAN.
 KULLANIM YERİ : YÜKSEK BASINÇ GEREKTİREN ENDÜSTRİYEL VE TARIMSAL HİDROLİK SİSTEMLER.
 RAKORLAMA : SIKMA.

									
ID/iÇ		OD/DÇ	WP/ÇB		BP/PB		BR/KY/r	W/A	L/B
inch	mm	mm	bar	psi	bar	psi	mm	g/m	m
1/8"	3.2	8.2	325	4713	1300	18850	30	220	+10
5/32"	4.1	9	300	4350	1200	17400	30	226	+10
3/16"	5	9.5	293	4249	1172	16994	35	260	+10
1/4"	6.5	12	287	4162	1148	16646	40	340	+10
5/16"	8	13	217	3147	868	12586	50	334	+10
3/8"	9.7	15.5	212	3074	848	12296	60	480	+10
1/2"	13	18.6	185	2683	740	10730	80	572	+10
5/8"	16.5	22.5	150	2175	600	8700	120	768	+10
3/4"	19.5	25.7	125	1813	500	7250	160	846	+10
1"	25	31.5	100	1450	400	5800	200	992	+10



-40°C / +100°C
 -40°F / +212°F

(For transfer of water based fluids and air max +65 °C / 149 °F)
 (Beim Transport von Wasser und Luft enthaltenden Flüssigkeiten max. 65 °C / 149 °F)
 (Per conduzione di fluidi a base acquosa ed aria max +65 °C / 149 °F)
 (İçinden geçen hava ve su bazlı akışkanlar için en yüksek +65 °C / 149 °F)

Possible applications:

Anwendungsbeispiele:

Esempi d' applicazione:

Bazı kullanım yeri örnekleri:



NORMS NORMEN NORME NORMLAR		MARKING BESCHRIFTUNG MARCATURA MARKALAMA	INK JET	COLOUR FARBEN COLORI RENKLER	
-------------------------------------	--	---	---------	---------------------------------------	--