


Steel Reinforced Very High Pressure Twin

Çelik Tel Örgülü Çok Yüksek Basınç Dayanımlı İkiz



TUBE : HYDRAULIC OILS, AIR AND WATER BASED FLUIDS RESISTANT POLYESTER.
 REINFORCEMENT : HIGH TENSILE 2 STEEL WIRE BRAIDS.
 COVER : OIL, ABRASION AND WEATHER RESISTANT POLYURETHANE.
 APPLICATION : FOR VERY HIGH PRESSURE HYDRAULIC SYSTEMS USED IN INDUSTRIES AND AGRICULTURES.
 FITTINGS : PRESSED.

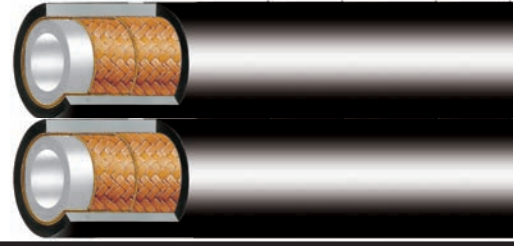

SEELE : BESTÄNDIGER POLYESTER GEGEN HYDRAULIKÖL, LUFT UND WASSER ENTHALTENDE FLÜSSIGKEITEN.
 EINLAGEN : HOCH REISSFESTES DOPPELTES STAHLDRAGTGEFLECHT.
 DECKE : ÖL- UND WETTERBESTÄNDIGES, ABRIEFESTES POLYURETHAN.
 ANWENDUNG : GEEIGNET ALS HYDRAULIKSCHLAUCH FÜR LANDWIRTSCHAFT UND BAUMASCHINEN MIT SEHR HOHEM ARBEITSDRUCK.
 EINBAUD : PRESSARMATUR.



SOTTOSTRATO : POLIESTERE RESISTENTE AGLI OLII IDRAULICI E FLUIDI A BASE ACQUOSA ED ARIA.
 RINFORZO : 2 TRECCE IN ACCIAIO AD ALTA TENACITÀ.
 COPERTURA : IN POLIURETANO ANTIABRASIONE, RESISTENTE ALL'OLIO ED AGLI AGENTI ATMOSFERICI.
 IMPIEGO : PER SISTEMI IDRAULICI AD ALTISSIMA PRESSIONE IN AGRICOLTURA ED INDUSTRIE.
 RACCORDI : PRESSATI.



ALT KAT : HİDROLİK YAĞLARA, HAVA VE SU BAZLI AKIŞKANLARA DAYANIKLI POLYESTER.
 TAKVİYE : YÜKSEK MUKAVEMETLİ İKİ KAT ÇELİK TEL ÖRGÜ.
 ÜST KAT : YAĞ, AŞINMA VE HAVA ŞARTLARINA DAYANIKLI POLİÜRETAN.
 KULLANIM YERİ : ÇOK YÜKSEK BASINÇ GEREKTİREN ENDÜSTRİYEL VE TARIMSAL HİDROLİK SİSTEMLER.
 RAKORLAMA : SIKMA.

ID/İÇ		OD/DÇ		WP/ÇB		BP/PB		BR/KY/r		W/A		L/B	
inch	mm	mm	mm	bar	psi	bar	psi	mm	mm	g/m	g/m	m	m
1/8"	3.2	9.8	450	6525	1800	26100	30	392	+10				
5/32"	4.1	10.5	400	5800	1600	23200	30	394	+10				
3/16"	5	11.3	390	5655	1560	22620	35	480	+10				
1/4"	6.5	13	390	5655	1560	22620	40	558	+10				
5/16"	8	15	330	4785	1320	19140	50	634	+10				
3/8"	9.7	17	315	4568	1260	18270	60	866	+10				
1/2"	13	20	275	3988	1100	15950	80	952	+10				
5/8"	16.5	23.5	195	2828	780	11310	115	1180	+10				
3/4"	19.5	27	180	2610	720	10440	160	1250	+10				
1"	25	34	160	2320	640	9280	200	1588	+10				



-40°C / +100°C
 -40°F / +212°F

(For transfer of water based fluids and air max +65 °C / 149 °F)

(Beim Transport von Wasser und Luft enthaltenden Flüssigkeiten max. 65 °C / 149 °F)

(Per conduzione di fluidi a base acquosa ed aria max +65 °C / 149 °F)

(İçinden geçen hava ve su bazlı akışkanlar için en yüksek +65 °C / 149 °F)

Possible applications:

Anwendungsbeispiele:

Esempi d' applicazione:

Bazı kullanım yeri örnekleri:



NORMS NORMEN NORME NORMLAR		MARKING BESCHRIFTUNG MARCATURA MARKALAMA	INK JET	COLOUR FARBEN COLORI RENKLER	
-------------------------------------	--	---	---------	---------------------------------------	--