


Textile Braided Medium Pressure Solvents And Paints

Tekstil Örgülü Orta Basınç Dayanımlı Solvent Ve Boya

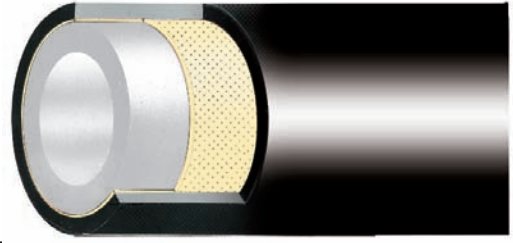

	TUBE REINFORCEMENT COVER APPLICATION FITTINGS	: SOLVENTS, PAINTS AND HYDRAULIC OILS RESISTANT POLYAMIDE. : HIGH TENSILE POLYESTER FIBER BRAID. : OIL-, ABRASION AND WEATHER RESISTANT POLYURETHANE. : FOR WATER BASED FLUIDS, SOLVENTS, PAINTS AND HYDRAULIC OILS AT MEDIUM PRESSURE. : PRESSED OR REUSABLE.
	SEELE EINLAGEN DECKE ANWENDUNG EINBAND	: BESTÄNDIGER POLYAMID GEGEN HYDRAULIKÖL, SOLVENT UND FARBE. : HOCH REISSFESTES POLYESTERGEFLECHT. : ÖL- UND WETTERBESTÄNDIGES, ABRIEBFESTES POLYURETHAN. : GEEIGNET FÜR MITTLEREN ARBEITSDRUCK BEI BE-UND ENTLADUNG VON SOLVENT, FARBEN, MINERALIEN, LUFT UND HYDRAULISCHEN ÖLEN. : PRESSARMATUR UND SCHRAUBARMATUR.
	SOTTOSTRATO RINFORZO COPERTURA IMPIEGO RACCORDI	: POLIAMMIDE RESISTENTE AI SOLVENTI, VERNICI ED OLII IDRAULICI. : TRECCA IN POLIESTERE AD ALTA TENACITÀ. : IN POLIURETANO ANTIABRASIONE, RESISTENTE ALL'OLIO ED AGLI AGENTI ATMOSFERICI. : PER FLUIDI A BASE ACQUOSA, SOLVENTI, VERNICI ED OLII SINTETICI A MEDIA PRESSIONE. : PRESSATI O RECUPERABILI.
	ALT KAT TAKVİYE ÜST KAT KULLANIM YERİ RAKORLAMA	: SOLVENTLERE, BOYALARA VE HİDROLİK YAĞLARA DAYANIKLI POLİAMİD. : YÜKSEK MUKAVEMETLİ POLYESTER ÖRGÜ. : YAĞ, AŞINMA VE HAVA ŞARTLARINA DAYANIKLI POLİÜRETAN. : ORTA BASINÇ DAYANIMI GEREKTİREN, SOLVENTLER, BOYALAR, HAVA, SU, MİNERAL VE HİDROLİK YAĞLARIN TAHLİYE İŞLERİNDE. : SIKMA VEYA VIDALI

ID/İÇ		OD/DÇ		WP/ÇB		BP/PB		BR/KY/r		W/A		L/B	
inch	mm	mm	bar	psi	bar	psi	mm	g/m	m				
1/8"	3.2	7.2	150	2175	600	8700	30	40	+10				
5/32"	4.1	7.9	150	2175	600	8700	30	41	+10				
3/16"	5	8.3	150	2175	600	8700	35	44	+10				
1/4"	6.5	11.4	137	1987	548	7946	40	80	+10				
5/16"	8	13	137	1987	548	7946	50	95	+10				
3/8"	9.7	15.5	137	1987	548	7946	65	130	+10				
1/2"	13	18.6	125	1813	500	7250	80	146	+10				
5/8"	16.5	22.7	100	1450	400	5800	100	231	+10				
3/4"	19.5	25.5	87	1262	348	5046	130	277	+10				
1"	25	32.6	75	1088	300	4350	160	420	+10				



-40°C / +100°C
-40°F / +212°F

(For transfer of water based fluids and air max +65 °C / 149 °F)
(Beim Transport von Wasser und Luft enthaltenden Flüssigkeiten max. 65 °C / 149 °F)
(Per conduzione di fluidi a base acquosa ed aria max +65 °C / 149 °F)
(İçinden geçen hava ve su bazlı akışkanlar için en yüksek +65 °C / 149 °F)

Possible applications: Anwendungsbeispiele: Esempi d' applicazione: Bazı kullanım yeri örnekleri:



NORMS NORMEN NORME NORMLAR		MARKING BESCHRIFTUNG MARCATURA MARKALAMA	INK JET	COLOUR FARBEN COLORI RENKLER	
-------------------------------------	--	---	---------	---------------------------------------	--