


Steel Reinforced High Pressure Solvents And Paints

Çelik Tel Örgülü Yüksek Basınç Dayanımlı Solvent Ve Boya

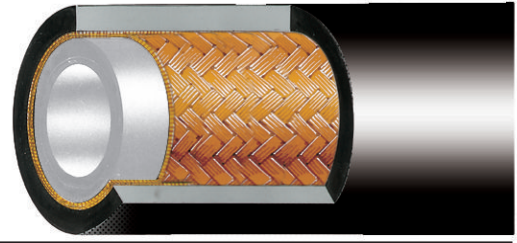

	TUBE	: SOLVENTS, PAINTS AND HYDRAULIC OILS RESISTANT POLYAMIDE.
	REINFORCEMENT	: HIGH TENSILE STEEL WIRE BRAID.
	COVER	: OIL, ABRASION AND WEATHER RESISTANT POLYURETHANE.
	APPLICATION	: FOR WATER BASED FLUIDS, SOLVENTS, PAINTS AND HYDRAULIC OILS AT HIGH PRESSURE.
	FITTINGS	: PRESSED.

	SEELE	: BESTÄNDIGER POLYAMID GEGEN HYDRAULIKÖL, SOLVENT UND FARBE.
	EINLAGEN	: HOCH REISSFESTES STAHLDRAHTGEFLECHT.
	DECKE	: ÖL- UND WETTERBESTÄNDIGES, ABRIEFESTES POLYURETHAN.
	ANWENDUNG	: GEEIGNET FÜR HOHEN ARBEITSDRUCK BEI BE-UND ENTLADUNG VON SOLVENT, FARBEN, MINERALIEN, LUFT UND HYDRAULISCHEN ÖLEN.
	EINBAND	: PRESSARMATUR.

	SOTTOSTRATO	: POLIAMMIDE RESISTENTE AI SOLVENTI, VERNICI ED OLII IDRAULICI.
	RINFORZO	: TRECCA IN ACCIAIO AD ALTA TENACITÀ.
	COPERTURA	: IN POLIURETANO ANTIABRASIONE, RESISTENTE ALL'OLIO ED AGLI AGENTI ATMOSFERICI.
	IMPIEGO	: PER FLUIDI A BASE ACQUOSA, SOLVENTI, VERNICI ED OLII SINTETICI A PRESSIONE ALTA.
	RACCORDI	: PRESSATI.

	ALT KAT	: SOLVENTLERE, BOYALARA VE HİDROLİK YAĞLARA DAYANIKLI POLİAMİD.
	TAKVİYE	: YÜKSEK MUKAVEMETLİ ÇELİK TEL ÖRGÜ.
	ÜST KAT	: YAĞ, AŞINMA VE HAVA ŞARTLARINA DAYANIKLI POLİÜRETAN.
	KULLANIM YERİ	: YÜKSEK BASINÇ DAYANIMI GEREKTİREN, SOLVENTLER, BOYALAR, HAVA, SU, MİNERAL VE HİDROLİK YAĞLARIN TAHLİYE İŞLERİNDE.
	RAKORLAMA	: SIKMA.


ID/iÇ		OD/DÇ		WP/ÇB		BP/PB		BR/KY/r		W/A		L/B	
inch	mm	mm	mm	bar	psi	bar	psi	mm	g/m	m			
1/8"	3.2	8.2	325	4713	1300	18850	25	100	+10				
5/32"	4.1	9	300	4350	1200	17400	30	111	+10				
3/16"	5	9.5	293	4249	1172	16994	35	128	+10				
1/4"	6.5	12	287	4162	1148	16646	40	165	+10				
5/16"	8	13	217	3147	868	12586	50	162	+10				
3/8"	9.7	15.5	212	3074	848	12296	60	231	+10				
1/2"	13	18.3	185	2683	740	10730	80	263	+10				
5/8"	16.5	22.5	150	2175	600	8700	120	368	+10				
3/4"	19.5	25.7	125	1813	500	7250	160	404	+10				
1"	25	31.5	100	1450	400	5800	200	462	+10				



-40 °C / +100 °C
-40 °F / +212 °F

(For transfer of water based fluids and air max +65 °C / 149 °F)
(Beim Transport von Wasser und Luft enthaltenden Flüssigkeiten max. 65 °C / 149 °F)
(Per conduzione di fluidi a base acquosa ed aria max +65 °C / 149 °F)
(İçinden geçen hava ve su bazlı akışkanlar için en yüksek +65 °C / 149 °F)

Possible applications: Anwendungsbeispiele: Esempi d' applicazione: Bazı kullanım yeri örnekleri:



NORMS NORMEN NORME NORMLAR	MARKING BESCHRIFTUNG MARCATURA MARKALAMA	INK JET	COLOUR FARBEN COLORI RENKLER		
-------------------------------------	---	---------	---------------------------------------	--	--