


Steel Reinforced High Pressure Solvents And Paints Twin

Çelik Tel Örgülü Yüksek Basınç Dayanımlı İkiz Solvent Ve Boya



TUBE : SOLVENTS, PAINTS AND HYDRAULIC OILS RESISTANT POLYAMIDE.
REINFORCEMENT : HIGH TENSILE STEEL WIRE BRAID.
COVER : OIL, ABRASION AND WEATHER RESISTANT POLYURETHANE.
APPLICATION : FOR WATER BASED FLUIDS, SOLVENTS, PAINTS AND HYDRAULIC OILS AT HIGH PRESSURE.
FITTINGS : PRESSED.

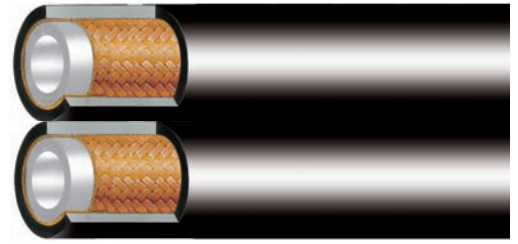

SEELE : BESTÄNDIGER POLYAMID GEGEN HYDRAULIKÖL, SOLVENT UND FARBE.
EINLAGEN : HOCH REISSFESTES STAHLDRAGTGEFLECHT.
DECKE : ÖL- UND WETTERBESTÄNDIGES, ABRIEFESTES POLYURETHAN.
ANWENDUNG : GEEIGNET FÜR HOHEN ARBEITSDRUCK BEI BE-UND ENTLADUNG VON SOLVENT, FARBEN, MINERALIEN, LUFT UND HYDRAULISCHEN ÖLEN.
EINBAND : PRESSARMATUR.



SOTTOSTRATO : POLIAMMIDE RESISTENTE AI SOLVENTI, VERNICI ED OLII IDRAULICI.
RINFORZO : TRECCA IN ACCIAIO AD ALTA TENACITÀ.
COPERTURA : IN POLIURETANO ANTIABRASIONE, RESISTENTE ALL'OLIO ED AGLI AGENTI ATMOSFERICI.
IMPIEGO : PER FLUIDI A BASE ACQUOSA, SOLVENTI, VERNICI ED OLII SINTETICI A PRESSIONE ALTISSIMA.
RACCORDI : PRESSATI.



ALT KAT : SOLVENTLERE, BOYALARA VE HİDROLİK YAĞLARA DAYANIKLI POLİAMİD.
TAKVİYE : YÜKSEK MUKAVEMETLİ ÇELİK TEL ÖRGÜ.
ÜST KAT : YAĞ, AŞINMA VE HAVA ŞARTLARINA DAYANIKLI POLİÜRETAN.
KULLANIM YERİ : YÜKSEK BASINÇ DAYANIMI GEREKTİREN, SOLVENTLER, BOYALAR, HAVA, SU, MİNERAL VE HİDROLİK YAĞLARIN TAHLİYE İŞLERİNDE.
RAKORLAMA : SIKMA.

ID/İÇ		OD/DÇ		WP/ÇB		BP/PB		BR/KY/r		W/A		L/B	
inch	mm	mm	mm	bar	psi	bar	psi	mm	mm	g/m	g/m	m	m
1/8"	3.2	8.2	325	4713	1300	18850	30	200	+10				
5/32"	4.1	9	300	4350	1200	17400	30	222	+10				
3/16"	5	9.5	293	4249	1172	16994	35	256	+10				
1/4"	6.5	12	287	4162	1148	16646	40	330	+10				
5/16"	8	13	217	3147	868	12586	50	324	+10				
3/8"	9.7	15.5	212	3074	848	12296	60	462	+10				
1/2"	13	18.3	185	2683	740	10730	80	526	+10				
5/8"	16.5	22.5	150	2175	600	8700	120	736	+10				
3/4"	19.5	25.7	125	1813	500	7250	160	808	+10				
1"	25	31.5	100	1450	400	5800	200	924	+10				



-40°C / +100°C
-40°F / +212°F


(For transfer of water based fluids and air max +65 °C / 149 °F)
(Beim Transport von Wasser und Luft enthaltenden Flüssigkeiten max. 65 °C / 149 °F)
(Per conduzione di fluidi a base acquosa ed aria max +65 °C / 149 °F)
(İçinden geçen hava ve su bazlı akışkanlar için en yüksek +65 °C / 149 °F)

Possible applications:

Anwendungsbeispiele:

Esempi d' applicazione:

Bazı kullanım yeri örnekleri:



NORMS NORMEN NORME NORMLAR		MARKING BESCHRIFTUNG MARCATURA MARKALAMA	INK JET	COLOUR FARBEN COLORI RENKLER	 
-------------------------------------	--	---	---------	---------------------------------------	---