


Steel Reinforced Very High Pressure Solvents And Paints Twin

Çelik Tel Örgülü Çok Yüksek Basınç Dayanımlı İkiz Solvent Ve Boya



TUBE : SOLVENTS, PAINTS AND HYDRAULIC OILS RESISTANT POLYAMIDE.
 REINFORCEMENT : HIGH TENSILE 2 STEEL WIRE BRAIDS.
 COVER : OIL, ABRASION AND WEATHER RESISTANT POLYURETHANE.
 APPLICATION : FOR WATER BASED FLUIDS, SOLVENTS, PAINTS AND HYDRAULIC OILS AT VERY HIGH PRESSURE.
 FITTINGS : PRESSED.

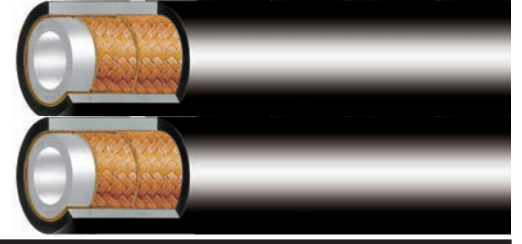

SEELE : BESTÄNDIGER POLYAMID GEGEN HYDRAULIKÖL, SOLVENT UND FARBE.
 EINLAGEN : HOCH REISSFESTES DOPPELTES STAHLDRAGTGEFLECHT.
 DECKE : ÖL- UND WETTERBESTÄNDIGES, ABRIEFESTES POLYURETHAN.
 ANWENDUNG : GEEIGNET FÜR SEHR HOHEN ARBEITSDRUCK BEI BE-UND ENTLADUNG VON SOLVENT, FARBEN, MINERALIEN, LUFT UND HYDRAULISCHEN ÖLEN.
 EINBAND : PRESSARMATUR.



SOTTOSTRATO : POLIAMMIDE RESISTENTE AI SOLVENTI, VERNICI ED OLII IDRAULICI.
 RINFORZO : 2 TRECCE IN ACCIAIO AD ALTA TENACITÀ.
 COPERTURA : IN POLIURETANO ANTIABRASIONE, RESISTENTE ALL'OLIO ED AGLI AGENTI ATMOSFERICI.
 IMPIEGO : PER FLUIDI A BASE ACQUOSA, SOLVENTI, VERNICI ED OLII SINTETICI A PRESSIONE ALTISSIMA.
 RACCORDI : PRESSATI.



ALT KAT : SOLVENTLERE, BOYALARA VE HİDROLİK YAĞLARA DAYANIKLI POLİAMİD.
 TAKVİYE : YÜKSEK MUKAVEMETLİ İKİ KAT ÇELİK TEL ÖRGÜ.
 ÜST KAT : YAĞ, AŞINMA VE HAVA ŞARTLARINA DAYANIKLI POLİÜRETAN.
 KULLANIM YERİ : ÇOK YÜKSEK BASINÇ DAYANIMI GEREKTİREN, SOLVENTLER, BOYALAR, HAVA, SU, MİNERAL VE HİDROLİK YAĞLARIN TAHLİYE İŞLERİNDE.
 RAKORLAMA : SIKMA.

ID/İÇ		OD/DÇ	WP/ÇB		BP/PB		BR/KY/r	W/A	L/B
inch	mm	mm	bar	psi	bar	psi	mm	g/m	m
1/8"	3.2	9.8	450	6525	1800	26100	30	344	+10
5/32"	4.1	10.5	400	5800	1600	23200	30	390	+10
3/16"	5	11.3	390	5655	1560	22620	35	476	+10
1/4"	6.5	13	390	5655	1560	22620	40	548	+10
5/16"	8	15	330	4785	1320	19140	50	624	+10
3/8"	9.7	17	315	4568	1260	18270	60	848	+10
1/2"	13	20	275	3988	1100	15950	80	926	+10
5/8"	16.5	23.5	195	2828	780	11310	115	1148	+10
3/4"	19.5	28	180	2610	720	10440	160	1222	+10
1"	25	34	160	2320	640	9280	200	1520	+10



-40°C / +100°C
 -40°F / +212°F


(For transfer of water based fluids and air max +65 °C / 149 °F)
 (Beim Transport von Wasser und Luft enthaltenden Flüssigkeiten max. 65 °C / 149 °F)
 (Per conduzione di fluidi a base acquosa ed aria max +65 °C / 149 °F)
 (İçinden geçen hava ve su bazlı akışkanlar için en yüksek +65 °C / 149 °F)

Possible applications:

Anwendungsbeispiele:

Esempi d' applicazione:

Bazı kullanım yeri örnekleri:



NORMS NORMEN NORME NORMLAR		MARKING BESCHRIFTUNG MARCATURA MARKALAMA	INK JET	COLOUR FARBEN COLORI RENKLER	 
-------------------------------------	--	---	---------	---------------------------------------	---