


# Textile Braided Medium Pressure

## Tekstil Örgülü Orta Basınç Dayanımlı



TUBE : HYDRAULIC OILS, AIR AND WATER BASED FLUIDS RESISTANT POLYESTER.  
 REINFORCEMENT : HIGH TENSILE POLYESTER FIBER BRAID.  
 COVER : OIL, ABRASION AND WEATHER RESISTANT POLYURETHANE.  
 APPLICATION : FOR AIR, WATER, MINERAL AND/OR SYNTHETIC OILS DISCHARGE AT MEDIUM PRESSURE.  
 FITTINGS : PRESSED OR REUSABLE.

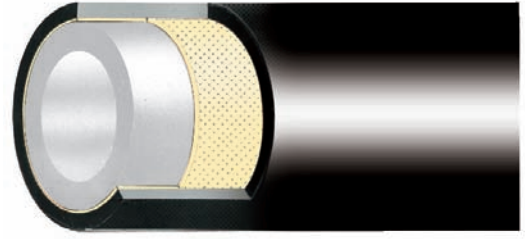

SEELE : BESTÄNDIGER POLYESTER GEGEN HYDRAULIKÖL, LUFT UND WASSER ENTHALTENDE FLÜSSIGKEITEN.  
 EINLAGEN : HOCH REISSFESTES POLYESTERGEFLECHT.  
 DECKE : ÖL- UND WETTERBESTÄNDIGES, ABRIEBFESTES POLYURETHAN.  
 ANWENDUNG : GEEIGNET FÜR TRANSPORT VON LUFT, WASSER UND/ODER HYDRAULIKÖLEN BEI MITTLEREM ARBEITSDRUCK.  
 EINBAND : PRESSARMATUR ODER SCHRAUBARMATUR.



SOTTOSTRATO : POLIESTERE RESISTENTE AGLI OLII IDRAULICI E FLUIDI A BASE ACQUOSA ED ARIA.  
 RINFORZO : TRECCA IN POLIESTERE AD ALTA TENACITÀ.  
 COPERTURA : IN POLIURETANO ANTIABRASIONE, RESISTENTE ALL'OLIO ED AGLI AGENTI ATMOSFERICI.  
 IMPIEGO : PER MANDATA DI ARIA, ACQUA, OLII MINERALI E/O SINTETICI A MEDIA PRESSIONE.  
 RACCORDI : PRESSATI O RECUPERABILI.



ALT KAT : HİDROLİK YAĞLARA, HAVA VE SU BAZLI AKIŞKANLARA DAYANIKLI POLYESTER.  
 TAKVİYE : YÜKSEK MUKAVEMETLİ POLYESTER ÖRGÜ.  
 ÜST KAT : YAĞ, AŞINMA VE HAVA ŞARTLARINA DAYANIKLI POLİÜRETAN.  
 KULLANIM YERİ : ORTA BASINÇ DAYANIMI GEREKTİREN, HAVA, SU MINERAL VE/VEYA HİDROLİK YAĞLARIN TAHLİYE İŞLERİNDE.  
 RAKORLAMA : SIKMA VEYA VIDALI.

| ID/İÇ |      | OD/DÇ |     | WP/ÇB |     | BP/PB |     | BR/KY/r |     | W/A |     | L/B |   |
|-------|------|-------|-----|-------|-----|-------|-----|---------|-----|-----|-----|-----|---|
| inch  | mm   | mm    | mm  | bar   | psi | bar   | psi | mm      | mm  | g/m | g/m | m   | m |
| 1/8"  | 3.2  | 7.5   | 150 | 2175  | 600 | 8700  | 25  | 47      | +10 |     |     |     |   |
| 5/32" | 4.1  | 8     | 150 | 2175  | 600 | 8700  | 30  | 44      | +10 |     |     |     |   |
| 3/16" | 5    | 8.3   | 150 | 2175  | 600 | 8700  | 35  | 43      | +10 |     |     |     |   |
| 1/4"  | 6.5  | 11.4  | 137 | 1987  | 548 | 7946  | 40  | 76      | +10 |     |     |     |   |
| 5/16" | 8    | 13    | 137 | 1987  | 548 | 7946  | 50  | 109     | +10 |     |     |     |   |
| 3/8"  | 9.7  | 15.5  | 137 | 1987  | 548 | 7946  | 60  | 137     | +10 |     |     |     |   |
| 1/2"  | 13   | 18.6  | 125 | 1813  | 500 | 7250  | 80  | 158     | +10 |     |     |     |   |
| 5/8"  | 16.5 | 22.7  | 100 | 1450  | 400 | 5800  | 110 | 244     | +10 |     |     |     |   |
| 3/4"  | 19.5 | 25.5  | 87  | 1262  | 348 | 5046  | 130 | 261     | +10 |     |     |     |   |
| 1"    | 25   | 32.6  | 75  | 1088  | 300 | 4350  | 160 | 449     | +10 |     |     |     |   |



-40°C / +100°C  
 -40°F / +212°F


(For transfer of water based fluids and air max +65 °C / 149 °F)  
 (Beim Transport von Wasser und Luft enthaltenden Flüssigkeiten max. 65 °C / 149 °F)  
 (Per conduzione di fluidi a base acquosa ed aria max +65 °C / 149 °F)  
 (İçinden geçen hava ve su bazlı akışkanlar için en yüksek +65 °C / 149 °F)

Possible applications:

Anwendungsbeispiele:

Esempi d' applicazione:

Bazı kullanım yeri örnekleri:



|                                     |  |                                                   |                            |                                       |  |
|-------------------------------------|--|---------------------------------------------------|----------------------------|---------------------------------------|--|
| NORMS<br>NORMEN<br>NORME<br>NORMLAR |  | MARKING<br>BESCHRIFTUNG<br>MARCATURA<br>MARKALAMA | TRANSFER TAPE<br>EMBOSSSED | COLOUR<br>FARBEN<br>COLORI<br>RENKLER |  |
|-------------------------------------|--|---------------------------------------------------|----------------------------|---------------------------------------|--|