


Textile Braided Medium-High Pressure R7

Tekstil Örgülü Orta-Yüksek Basınç Dayanımlı R7



TUBE : HYDRAULIC OILS, AIR AND WATER BASED FLUIDS RESISTANT POLYESTER.
 REINFORCEMENT : HIGH TENSILE 2 POLYESTER FIBER BRAIDS.
 COVER : OIL, ABRASION AND WEATHER RESISTANT POLYURETHANE.
 APPLICATION : FOR AIR, WATER, MINERAL AND/OR SYNTHETIC OILS DISCHARGE AT MEDIUM -HIGH PRESSURE.
 FITTINGS : PRESSED OR REUSABLE.

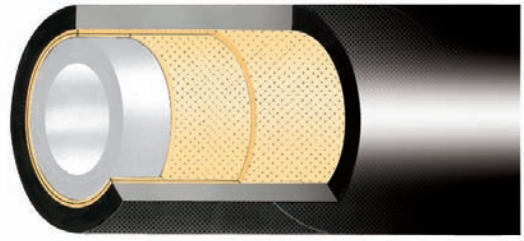

SEELE : BESTÄNDIGER POLYESTER GEGEN HYDRAULIKÖL, LUFT UND WASSER ENTHALTENDE FLÜSSIGKEITEN.
 EINLAGEN : HOCH REISSFESTES DOPPEL TES POLYESTERGEFLECHT.
 DECKE : ÖL- UND WETTERBESTÄNDIGES, ABRIEBFESTES POLYURETHAN
 ANWENDUNG : GEEIGNET FÜR TRANSPORT VON LUFT, WASSER UND/ODER HYDRAULIKÖLEN BEI MITTLEREM - HOHEM ARBEITSDRUCK.
 EINBAND : PRESSARMATUR ODER SCHRAUBARMATUR.



SOTTOSTRATO : POLIESTERE RESISTENTE AGLI OLII IDRAULICI E FLUIDI A BASE ACQUOSA ED ARIA.
 RINFORZO : 2 TRECCE IN POLIESTERE AD ALTA TENACITÀ.
 COPERTURA : IN POLIURETANO ANTIABRASIONE, RESISTENTE ALL'OLIO ED AGLI AGENTI ATMOSFERICI.
 IMPIEGO : PER MANDATA DI ARIA, ACQUA, OLII MINERALI E/O SINTETICI A PRESSIONE MEDIO-ALTA.
 RACCORDI : PRESSATI O RECUPERABILI.



ALT KAT : HİDROLİK YAĞLARA, HAVA VE SU BAZLI AKIŞKANLARA DAYANIKLI POLYESTER.
 TAKVİYE : YÜKSEK MUKAVEMETLİ İKİ KAT POLYESTER ÖRGÜ.
 ÜST KAT : YAĞ, AŞINMA VE HAVA ŞARTLARINA DAYANIKLI POLİÜRETAN.
 KULLANIM YERİ : ORTA-YÜKSEK BASINÇ DAYANIMI GEREKTİREN, HAVA, SU MİNERAL VE/VEYA HİDROLİK YAĞLARIN TAHLİYE İŞLERİNDE.
 RAKORLAMA : SIKMA VEYA VİDALI.

									
ID/iÇ		OD/DÇ	WP/ÇB		BP/PB		BR/KY/r	W/A	L/B
inch	mm	mm	bar	psi	bar	psi	mm	g/m	m
1/8"	3.2	8	227	3292	908	13166	25	52	+10
5/32"	4.1	9	250	3625	1000	14500	30	59	+10
3/16"	5	9.5	230	3335	920	13340	35	64	+10
1/4"	6.5	11.8	200	2900	800	11600	40	89	+10
5/16"	8	14	190	2755	760	11020	50	121	+10
3/8"	9.7	16.2	175	2538	700	10150	60	154	+10
1/2"	13	20	150	2175	600	8700	80	214	+10
5/8"	16.5	24	125	1813	500	7250	120	309	+10
3/4"	19.5	27	100	1450	400	5800	150	308	+10
1"	25	34	75	1088	300	4350	200	565	+10



-40 °C / +100 °C
 -40 °F / +212 °F

(For transfer of water based fluids and air max +65 °C / 149 °F)
 (Beim Transport von Wasser und Luft enthaltenden Flüssigkeiten max. 65 °C / 149 °F)
 (Per conduzione di fluidi a base acquosa ed aria max +65 °C / 149 °F)
 (İçinden geçen hava ve su bazlı akışkanlar için en yüksek +65 °C / 149 °F)

Possible applications:

Anwendungsbeispiele:

Esempi d' applicazione:

Bazı kullanım yeri örnekleri:



NORMS
 NORMEN
 NORME
 NORMLAR

SAE 100 R7, EN 855 R7,
 ISO 3949, SAEJ517,
 DIN24951

MARKING
 BESCHRIFTUNG
 MARCATURA
 MARKALAMA

INK JET

COLOUR
 FARBEN
 COLORI
 RENKLER

