


Textile (Aramid) Braided High Pressure

Tekstil (Aramid) Örgülü Yüksek Basınç Dayanımlı

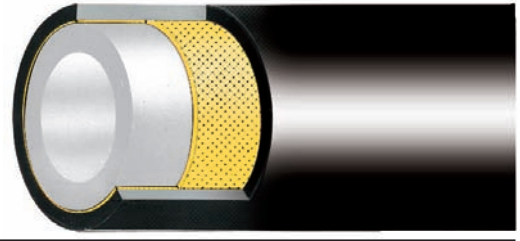

	TUBE REINFORCEMENT COVER APPLICATION FITTINGS	: HYDRAULIC OILS, AIR AND WATER BASED FLUIDS RESISTANT POLYESTER. : VERY HIGH TENSILE ARAMIDIC FIBER BRAID. : OIL, ABRASION AND WEATHER RESISTANT POLYURETHANE. : FOR AIR, WATER, MINERAL AND/OR SYNTHETIC OILS DISCHARGE AT HIGH PRESSURE. : PRESSED OR REUSABLE.
	SEELE EINLAGEN DECKE ANWENDUNG EINBAND	: BESTÄNDIGER POLYESTER GEGEN HYDRAULIKÖL, LUFT UND WASSER ENTHALTENDE FLÜSSIGKEITEN. : HOCH REISSFESTES ARAMIDGEFLECHT. : ÖL- UND WETTERBESTÄNDIGES, ABRIEBFESTES POLYURETHAN. : GEEIGNET FÜR TRANSPORT VON LUFT, WASSER UND/ODER HYDRAULIKÖLEN BEI HOHEM ARBEITSDRUCK. : PRESSARMATUR ODER SCHRAUBARMATUR.
	SOTTOSTRATO RINFORZO COPERTURA IMPIEGO RACCORDI	: POLIESTERE RESISTENTE AGLI OLII IDRAULICI E FLUIDI A BASE ACQUOSA ED ARIA. : TRECCA IN FIBRA ARAMIDICA AD ALTISSIMA TENACITÀ. : IN POLIURETANO ANTIABRASIONE, RESISTENTE ALL'OLIO ED AGLI AGENTI ATMOSFERICI. : PER MANDATA DI ARIA, ACQUA, OLII MINERALI E/O SINTETICI AD ALTISSIMA PRESSIONE. : PRESSATI O RECUPERABILI.
	ALT KAT TAKVİYE ÜST KAT KULLANIM YERİ RAKORLAMA	: HİDROLİK YAĞLARA, HAVA VE SU BAZLI AKIŞKANLARA DAYANIKLI POLYESTER. : YÜKSEK MUKAVEMETLİ TEK KAT ARAMİD ÖRGÜ. : YAĞ, AŞINMA VE HAVA ŞARTLARINA DAYANIKLI POLİÜRETAN. : YÜKSEK BASINÇ DAYANIMI GEREKTİREN, HAVA, SU MINERAL VE/VEYA HİDROLİK YAĞLARIN TAHLİYE İŞLERİNDE. : SIKMA VEYA VİDALI.

inch	mm	mm	bar	psi	bar	psi	mm	g/m	m
1/8"	3.2	7.5	300	4350	1200	17400	25	46	+10
5/32"	4.1	8.2	300	4350	1200	17400	30	52	+10
3/16"	5	8.5	250	3625	1000	14500	35	48	+10
1/4"	6.5	11.4	225	3263	900	13050	40	82	+10
5/16"	8	13	200	2900	800	11600	55	92	+10
3/8"	9.7	15	190	2755	760	11020	75	102	+10
1/2"	13	18.6	175	2538	700	10150	85	136	+10
5/8"	16.5	22.5	150	2175	600	8700	110	217	+10
3/4"	19.5	25.5	130	1885	520	7540	140	245	+10
1"	25	32	100	1450	400	5800	180	363	+10

	-40 °C / +100 °C -40 °F / +212 °F	(For transfer of water based fluids and air max +65 °C / 149 °F) (Beim Transport von Wasser und Luft enthaltenden Flüssigkeiten max. 65 °C / 149 °F) (Per conduzione di fluidi a base acquosa ed aria max +65 °C / 149 °F) (İçinden geçen hava ve su bazlı akışkanlar için en yüksek +65 °C / 149 °F)
--	--------------------------------------	--

Possible applications: Anwendungsbeispiele: Esempi d' applicazione: Bazı kullanım yeri örnekleri:



NORMS NORMEN NORME NORMLAR		MARKING BESCHRIFTUNG MARCATURA MARKALAMA	INK JET	COLOUR FARBEN COLORI RENKLER	
-------------------------------------	--	---	---------	---------------------------------------	--