


2023

LIST OF PRODUCTS



ÖZBİL A.Ş
www.ozbilas.com

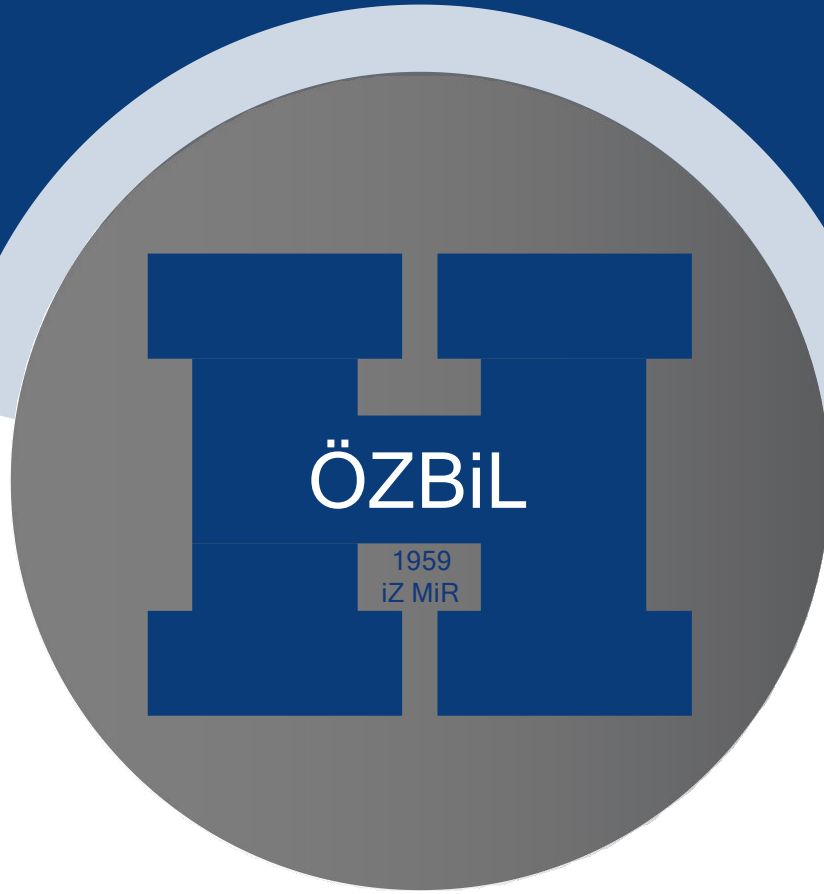

PVC HONES

SPIRAL REINFORCED HOSES

STEEL SPIRAL REINFORCED HOSES (BOSPHORUS)

FLAT HOSES (LAY FLAT)

GARDEN WATERING HOSES!

BRAIDED HOSES

SPIRAL REINFORCED HOSES

TEOS

GIRLY-SINK SIPHON

Very strong and flexible flat, PVC inner surface, shock-resistant rigid PVC spiral reinforcement, in agriculture, industry, construction, in water, in light chemicals absorption and evacuation works.



ID		OD	WEIGHT
inch	mm	bar	gr/m
5/8"	16	8	120
3/4"	19	6	140
1"	25	6	180
1 1/7"	29	6	200
1 1/4"	32	5	220
1 1/2"	38	5	260
2"	5	4	400

TROY SLD

SUPER LIGHT SERVICE WATER TRANSMITTER

Very strong and flexible flat PVC inner surface, shock-resistant rigid PVC spiral reinforcement, in agriculture, industry, construction, in water, in light chemicals absorption and evacuation works.



ID		VACUUM	WEIGHT	
inch	mm	m/H ₂ O	gr/m	
3/4"	19	23	7	200
1"	25	20	6	250
1 1/4"	32	18	6	320
1 1/2"	38	16	6	420
2"	51	13	6	645
2 1/2"	63	11	6	810
3"	76	10	6	1150
4"	102	10	6	1710

TROY LD

LIGHT SERVICE WATER TRANSMITTER

Very strong and flexible flat, PVC inner surface, shock-resistant rigid PVC spiral reinforcement, in agriculture, industry, construction, in water, in light chemicals absorption and evacuation works.



ID		OD	VACUUM	WEIGHT
inch	mm	bar	m/H ₂ O	gr/m
3/4"	19	24	8	240
1"	25	22	8	290
	30	21	8	345
1 1/4"	32	20	8	370
	35	19	8	415
1 1/2"	38	18	8	485
	40	18	8	505
	45	17	8	570
2"	51	15	8	700
	55	13	7	765
	60	13	7	825
2 1/2"	63	13	7	880
	70	12	7	1100
3"	76	12	7	1250
	80	12	6	1400
	90	11	6	1650
4"	102	11	6	1850
	110	10	5	2200
	120	10	4	2700
5"	127	10	4	3000
6"	152	9	3	3700
8"	203	6	2	5950

CIMENA

RED TRANSMITTER

Very strong and flexible flat PVC inner surface, shock-resistant rigid PVC spiral reinforcement, in agriculture, industry, construction, in water, dust evacuation works.



ID		VACUUM	WEIGHT
inch	mm	m/H ₂ O	gr/m
3/4"	19	6	150
1"	25	6	170
1 1/4"	32	6	275
1 1/2"	38	6	340
2"	51	5	540
2 1/2"	63	5	840
3"	76	5	1110
4"	102	5	1470
5"	127	5	2180
6"	152	5	2290
8"	203	5	3980

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

TROY ST

MEDIUM SERVICE RECEIVER-TRANSMITTER

Very strong and flexible flat, PVC inner surface, shock-resistant rigid PVC spiral reinforcement, irrigation, spraying, fertilization, detergent, acid etc. discharge works in agriculture and industry.



ID		BP	CAVUUM	WEIGHT
inch	mm	bar	m/H:0	gr/m
3/4"	19	26	8	280
1"	25	24	8	350
	30	22	8	440
1 1/4"	32	21	8	460
	35	20	8	520
1 1/2"	38	19	8	570
	40	19	8	590
	45	19	8	670
2"	51	16	8	830
	55	15	7	880
	60	15	7	950
2 1/2 "	63	15	7	1000
	70	13	7	1150
3	76	13	7	1450
	80	13	6	1530
	90	13	6	1750
4"	102	12	6	2150
	110	11	5	2450
	120	11	5	2900
5"	127	11	4	3200
6"	152	10	3	4200
8"	203	8	2	6400

MEDUSA MD

STANDARD SERVICE WATER TRANSMITTER

Very strong and flexible flat, PVC inner surface, shock-resistant rigid PVC spiral reinforcement, in agriculture, industry, construction, homes, sewers, water, salt water, light chemicals, medium duty absorption and compression works.



ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H:0	gr/m
3/4"	19	32	9	360
1"	25	28	9	480
	30	24	9	550
1 1/4"	32	24	9	580
	35	24	9	640
1 1/2"	38	24	9	670
	40	24	9	700
	45	22	9	870
2"	51	22	9	975
	55	20	9	1080
	60	20	9	1250
2 1/2 "	63	20	9	1350
	70	18	9	1580
3"	76	18	9	1700
	80	15	9	1800
	90	15	8	2100
4"	102	14	8	2600
	110	13	8	2900
	120	13	7	3200
5"	127	12	7	3650
6"	152	11	7	5100
8"	203	9	6	7850

TERMESSOS

POOL - JACUZZI

Very strong and flexible plain white PVC inner surface, warm water discharge works in pools, jacuzzis.



ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H:0	gr/m
	15	30	7	180
	20	27	7	250
1"	25	27	7	410
	28	27	7	280
1 1/4"	32	36	7	600
	40	27	7	730
	42	24	7	720
	43	24	7	680
	55	24	7	930

PEGASUS MD

MEDIUM SERVICE FUEL RECEIVER-TRANSMITTER

Very strong and flexible flat, made of PVC/NITRILE material (super elastic cold resistant material on request) resistant to fuel oils and oils, medium service, fuel oil and fuel-oil absorption and compression works.



ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H:0	gr/m
3/4"	19	35	9	360
1"	25	26	9	480
1 1/4"	32	22	9	580
1 1/2"	38	22	9	670
	40	22	9	700
2"	51	20	9	975
	55	18	9	1080
	60	18	9	1250
2 1/2 "	63	18	9	1350
	70	16	9	1580
3"	76	16	9	1700
	80	13	9	1800

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

HERAKLES HD

HEAVY DUTY RECEIVER-TRANSMITTER

Very strong and flexible flat, PVC inner surface, shock resistant rigid PVC spiral reinforcement, in agriculture, industry, construction, in homes, water, salt water, light chemicals, etc. in heavy-duty suction and compression work.



ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H ₂ O	gr/m
3/4"	19	40	9	450
1"	25	38	9	570
	30	30	9	650
1 1/4"	32	30	9	680
	35	30	9	730
1 1/2"	38	30	9	780
	40	30	9	810
	45	25	9	960
2"	51	25	9	1150
	55	25	9	1350
2 1/2 "	60	25	9	1550
	63	20	9	1600
	70	20	9	1800
3"	76	20	9	1950
	80	20	9	2100
	90	17	9	2400
4"	102	15	9	3250

LAGINA

SUPERELASTIC MEDIUM SERVICE RECEIVER-TRANSMITTER

In agriculture, industry, construction and houses, sewers, all kinds of water, salt water, mild chemicals, corrosive substances, etc. medium service absorption and compression works. it is specifically designed for use in very cold climates.



ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H ₂ O	gr/m
3/4"	19	19	9	360
1"	25	19	9	480
	30	17	9	550
1 1/4"	32	16	9	580
	35	15	9	640
	38	15	9	670
1 1/2"	40	14	9	700
	45	14	9	870
	51	14	9	975
2"	55	14	9	1080
	60	14	9	1250
	63	13	9	1350
2 1/2 "	70	11	9	1580
	76	11	9	1700
	80	11	9	1800
3"	90	9	8	2100
	90	9	8	2100
	102	9	8	2600

KNIDOS

SUPERELASTIC MEDIUM SERVICE RECEIVER-TRANSMITTER

In agriculture, industry, construction and houses, sewers, all kinds of water, salt water, mild chemicals, corrosive substances, etc. medium service absorption and compression works. it is especially designed for use in very cold climates.




ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H ₂ O	gr/m
3/4"	19	18	9	360
1"	25	18	9	480
	30	16	9	550
1 1/4"	32	15	9	580
	35	14	9	640
1 1/2"	38	14	9	670
	40	13	9	700
	45	13	9	870
2"	51	13	9	975
	55	13	9	1080
	60	13	9	1250
2 1/2 "	63	12	9	1350
	70	10	9	1580
	76	10	9	1700
3"	80	10	9	1800
	90	9	8	2100
	90	9	8	2100
4"	102	9	8	2600

LYMRA HD - PU

HEAVY DUTY WEARABLE RECEIVER-TRANSMITTER

Very strong and flexible flat PU inner surface, shock-resistant rigid PVC spiral reinforcement, all kinds of water, salt water, light chemicals, corrosive substances etc. heavyduty suction and compression works in agriculture, industry, construction and sewers.



ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H ₂ O	gr/m
2"	40	30	9	810
	45	25	9	960
	51	25	9	1150
3"	60	25	9	1550
	76	20	9	1950
4"	80	20	9	2100
	102	15	9	3250
	120	15	8	3800
5"	127	15	8	4150
6"	152	12	7	6200

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

LETOON ST



STANDARD SERVICE FOOD DONOR

Very strong and flexible flat, suitable for food PVC inner surface serves as standard, water, soft drink, mineral water, fruit juices in the discharge works.



ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H ₂ O	gr/m
3/4"	19	26	7	280
1"	25	24	6	350
	30	22	6	440
1 1/4"	32	21	6	460
	35	20	6	520
1 1/2"	38	19	6	570
	40	19	6	590
	45	19	6	670
2"	51	16	6	830
	55	15	6	880
	60	15	6	950
2 1/2 "	63	15	6	1000
	70	13	6	1150
3"	76	13	6	1450
	80	13	6	1530
	90	13	6	1750
4"	102	12	6	2150

LETOON MD



MEDIUM SERVICE FOOD DONOR

Very strong and flexible flat, suitable for food PVC inner surface serves as standard, water, soft drink, mineral water, fruit juices in the discharge works.



ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H ₂ O	gr/m
3/4"	19	32	9	360
1"	25	28	9	480
	30	24	9	550
1 1/4"	32	24	9	580
	35	24	9	640
1 1/2"	38	24	9	670
	40	24	9	700
	45	22	9	870
2"	51	22	9	975
	55	20	9	1080
	60	20	9	1250
2 1/2 "	63	20	9	1350
	70	18	9	1580
3"	76	18	9	1700
	80	15	9	1800
	90	15	8	2100
4"	102	14	8	2600

LIKYA ST



STANDARD SERVICE WINE TRANSMITTER

Very strong and flexible flat, food-suitable PVC inner surface serves as standard, in the discharge of liquor, wine, soft drinks, mineral water, juices with an alcohol content of up to 15%.



İÇ		PB	VAKUM	Ağr
inch	mm	bar	m/H ₂ O	gr/m
3/4"	19	26	7	280
1"	25	24	6	350
	30	22	6	440
1 1/4"	32	21	6	460
	35	20	6	520
1 1/2"	38	19	6	570
	40	19	6	590
	45	19	6	670
2"	51	16	6	830
	55	15	6	880
	60	15	6	950
2 1/2 "	63	15	6	1000
	70	13	6	1150
3	76	13	6	1450
	80	13	6	1530
	90	13	6	1750
4"	102	12	6	2150

LIKYA HD



HEAVY DUTY WINE TRANSMITTER

Very strong and flexible flat, food-suitable PVC inner surface standard service, all kinds of liquors with an alcohol content of up to 15% and alcoholic beverages, wines, soft drinks, mineral water, fruit juices are drained.



İÇ		PB	VAKUM	Ağr
inch	mm	bar	m/H ₂ O	gr/m
3/4"	19	32	9	450
1"	25	28	9	570
	30	24	9	650
1 1/4"	32	24	9	680
	35	24	9	730
1 1/2"	38	24	9	780
	40	24	9	810
	45	22	9	960
2"	51	22	9	1150
	55	20	9	1350
	60	20	9	1550
2 1/2 "	63	20	9	1600
	70	18	9	1800
3	76	18	9	1950
	80	15	9	2100
	90	15	8	2400
4"	102	14	8	3250

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

URARTU LD

LIGHT SERVICE VENTILATION

Light duty in all kinds of air, smoke, gas, dust, fiber, sawdust, liquid, etc. in absorption works. Especially in the textile and wood furniture industry.




ID		VACUUM	WEIGHT
inch	mm	m/H ₂ O	gr/m
3/4"	19	3	100
1"	25	3	110
1 1/4"	30	3	145
	32	3	160
1 1/2"	35	3	175
	38	3	200
2"	40	2,5	205
	51	2,5	300
2 1/2 "	63	2,5	470
	70	2,5	510
3"	76	2	560
	90	2	680
4"	102	2	760
	120	1,5	1000
5"	127	1,5	1120
6"	152	1	1500
8"	203	1	2200

URARTU ST

STANDARD SERVICE VENTILATION

All kinds of air, smoke, gas, dust, fiber, chips, liquids, etc. in the absorption works. Especially in the textile and wood furniture industry.



ID		VACUUM	WEIGHT
inch	mm	m/H ₂ O	gr/m
3/4"	19	3	110
1"	25	3	150
1 1/4"	30	3	190
	32	3	200
1 1/2"	35	3	230
	38	3	240
2"	40	2,5	280
	51	2,5	395
2 1/2 "	63	2,5	520
	70	2,5	580
3"	76	2	640
	90	2	780
4"	102	2	970
	120	1,5	1200
5"	127	1,5	1250
6"	152	1	1600
8"	203	1	2400

SALAMIS MD

MEDIUM SERVICE VENTILATION

All kinds of air, smoke, gas, dust, fiber, chips, liquids, etc. in the absorption works. Especially in the textile and wood furniture industry.



ID		VACUUM	WEIGHT
inch	mm	m/H ₂ O	gr/m
3/4"	19	6	120
1"	25	6	175
1 1/4"	30	6	210
	32	6	240
1 1/2"	35	6	265
	38	6	310
2"	40	6	330
	51	6	450
2 1/2"	63	5,5	620
	70	5	700
3"	76	5	780
	102	5	1100
4"	120	4,5	1500
	127	4,5	1600
6"	152	4	2000
8"	203	3	2650
10"	254	2	3000

EPHESOS

FIREPROOF-GAS PIPES INSULATION CLADDING

Very strong and flexible flat, PVC inner surface, self-extinguishing in the face of flame, in the protection and isolation of gas pipes.



ID		WEIGHT
inch	mm	gr/m
1/2"	10	75
	12	80
	14	85
5/8"	16	95
	18	105
	20	120
1"	22	135
	25	160
	28	190
1 1/4"	30	195
	32	205
	35	230
1 1/2"	38	250
	40	280
	45	350
2"	51	430
	60	525

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

STEEL SPIRAL REINFORCED HOSES

BOSPHORUS

STEEL SPIRAL

Very strong and flexible flat, transparent PVC inner surface, water, light chemicals, drainage systems in shipyards, suction pumps, suction and discharge works in agricultural industry.



ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H ₂ O	gr/m
1/2"	12	21	9	180
	14	18	9	200
5/8"	16	18	9	225
	18	18	9	280
3/4"	20	15	9	340
	25	15	9	510
1"	30	13	9	600
	32	13	9	650
1 1/4"	35	12	9	730
	38	12	9	800
1 1/2"	40	9	9	870
	45	9	8	1100
2"	51	9	8	1200
	60	7	7	1800
2 1/2"	63	7	7	1950
	70	6	7	2200
3"	76	6	7	2500
	80	6	7	2700
4"	90	6	6	3000
	102	6	6	3400
5"	105	6	6	3490
	114	6	6	4380
6"	127	6	6	4700
	152	6	6	6350

BOSPHORUS FOOD



STEEL SPIRAL FOOD SUIT SUITABLE

Very strong and flexible flat, transparent PVC inner surface suitable for food, water, soft drinks, mineral water, fruit juices suction and discharge works, drainage systems in shipyards, suction pumps, food and agricultural industry.



ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H ₂ O	gr/m
1/2"	12	21	9	180
	14	18	9	200
5/8"	16	18	9	225
	18	18	9	280
3/4"	20	15	9	340
	25	15	9	510
1"	30	13	9	600
	32	13	9	650
1 1/4"	35	12	9	730
	38	12	9	800
1 1/2"	40	9	9	870
	45	9	8	1100
2"	51	9	8	1200
	60	7	7	1800
2 1/2"	63	7	7	1950
	70	6	7	2200
3"	76	6	7	2500
	80	6	7	2700
4"	90	6	6	3000
	102	6	6	3400
5"	105	6	6	3490
	114	6	6	4380
6"	127	6	6	4700
	152	6	6	6350

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

BOSPHORUS +

STEEL SPIRAL

Very strong and flexible flat, transparent PVC inner surface, water, light chemicals, drainage systems in shipyards, suction pumps, suction and discharge works in agricultural industry.




ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H ₂ O	gr/m
1/2"	12	36	9	190
	14	36	9	230
5/8"	16	36	9	260
	18	33	9	295
3/4"	20	30	9	340
1"	25	30	9	520
	30	27	9	630
1 1/4"	32	27	9	660
	35	27	9	750
1 1/2"	38	27	9	800
	40	27	9	950
	45	27	9	1150
2"	51	21	9	1330
	60	18	9	1850
2 1/2"	63	18	9	2000
	70	15	9	2300
3"	76	13	9	2600
	80	12	9	2750
	90	12	9	3100
4"	102	9	9	3700
	105	9	9	3850
	114	9	9	4500
5"	127	9	9	4700
6"	152	7	9	6900

BOSPHORUS-SAN

SANITARY INSTALLATION HOSE

All kinds of water, soft drinks, mineral water, fruit juices, suction and discharge works. Especially in shipyards, shipyards, drainage systems, suction pumps, food and agricultural industry and machinery, etc.



ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H ₂ O	gr/m
1/2"	12	21	9	180
	14	18	9	200
5/8"	16	18	9	225
	18	18	9	280
3/4"	20	15	9	340
1"	25	15	9	510
	30	13	9	600
1 1/4"	32	13	9	650
	35	12	9	730
1 1/2"	38	12	9	800
	40	9	9	870
	45	9	8	1100
2"	51	9	8	1200
	60	7	7	1800
2 1/2"	63	7	7	1950
	70	6	7	2200
3"	76	6	7	2500
	80	6	7	2700
	90	6	6	3000
4"	102	6	6	3400
	105	6	6	3490
	114	6	6	4380
5"	127	6	6	4700
6"	152	6	6	6350

BOSPHORUS ST

Braided & STEEL SPIRALLI

Very strong and flexible flat, transparent PVC inner surface, water, light chemicals, drainage systems in shipyards, suction pumps, suction and discharge works in agricultural industry.



ID		BP	VACUUM	WEIGHT
inch	mm	bar	m/H ₂ O	gr/m
3/4"	19	45	9	420
1"	25	45	9	680
1 1/4"	32	45	9	800
1 1/2"	38	45	9	1150
	40	45	9	1200
	45	45	9	1400
2"	51	45	9	1600

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

FLAT HOSES (LAY-FLAT)

TYANA S

SUPER LIGHT DUTY FLAT TRANSMITTER

All kinds of light service water discharge works in agriculture and industry.



TYANA L

STANDARD SERVICE FLAT TRANSMITTER

All kinds of light service water discharge works in agriculture and industry.



İÇ		ÇB	PB	Ağr
inch	mm	bar	bar	gr/m
1 1/2"	38	3	6	195
	40	3	6	205
2"	48	3	6	240
	52	3	6	260

ID		OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1 1/4"	32	7	21	190
	35	6	18	210
1 1/2"	38	6	18	225
	40	5	15	235
	45	5	15	265
2"	48	5	15	280
	52	5	15	305
	60	5	15	355
2 1/2"	63	4	12	370
	70	4	12	420
3"	76	4	12	460
	81	4	12	495
	90	4	12	580
4"	102	4	12	650
	110	4	12	780
	127	4	12	1000
6"	153	3	9	1300
8"	203	3	9	2050

TYANA SL

LIGHT DUTY FLAT TRANSMITTER

All kinds of light service water discharge works in agriculture and industry.



ID	OP	BP	WEIGHT	
inch	mm	bar	bar	gr/m
1 1/2"	32	5	14	175
	38	4	12	205
2"	52	4	12	275
	60	3.5	10	330
2 1/2"	63	3.5	10	360
	76	3.5	10	420
3"	81	3	8	460
	102	3	8	600
6"	153	2.5	7	1200

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m



TYANA M

MEDIUM DUTY FLAT TRANSMITTER

All kinds of light service water of medium service in agriculture and industry, light chemical etc. in evacuation works.



ID		OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1"	20	10	30	160
	25	10	30	195
	30	10	30	230
1 1/4"	32	9	27	240
	35	8	24	280
	38	8	24	300
1 1/2"	40	8	24	325
	45	8	24	355
	52	8	24	410
2"	55	8	24	490
	60	8	24	540
	63	8	24	565
2 1/2"	70	7	21	620
	76	7	21	685
	81	7	21	740
3"	84	7	21	770
	90	7	21	870
	102	7	21	1000
4"	110	7	21	1150
	127	6	18	1350
	153	4	12	1650
8"	203	2,5	7,5	2300

TYANA H

HEAVY DUTY FLAT DELIVERY

All kinds of heavy duty light service water in agriculture and industry, light chemicals etc. in evacuation works.



ID		OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1 1/2"	38	16	48	455
	40	16	48	500
	45	16	48	560
2"	51	16	48	680
	55	15	45	730
	63	15	45	900
2 1/2"	70	14	42	990
	76	12	36	1075
	90	11	33	1255
3"	102	10	30	1550
	127	8	24	1955
	153	6	18	2605
8"	203	4	12	3405

TYANA MINE

ALEVE DAVANIK FLAT EXPORTER

Flame-resistant water drain hose in mines.



ID		OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
10 BAR				
1 1/2"	38.1	10	30	330
2"	50.8	10	30	510
2 1/2"	63.5	10	30	750
14BAR				
1 1/2"	38.1	14	42	370
2"	50.8	14	42	540
2 1/2"	63.5	14	42	770

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

GARDEN IRRIGATION HOSES

ECO

PVC TRANSPARENT BRAIDED

Transparent PVC, house, garden, field, construction and all kinds of irrigation works.



ID		OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	6	4	12	70
5/16"	8	4	12	90
3/8"	10	4	12	95
1/2"	12.5	3	10	100
5/8"	16	3	10	140
3/4"	19	3	10	160
1"	25	2.5	7	270
1 1/4"	32	2.5	7	410
1 1/2"	38	2.5	7	560
	40	2	5	590
	45	2	5	760
2"	50	2	5	950

HERMES

PVC TRANSPARENTED

In house, garden, field, construction and all kinds of irrigation works.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
3/8"	10	14.6	5	15	110
1/2"	12.5	16.5	5	15	115
5/8"	16	20.3	5	15	150
3/4"	19	23.5	5	15	190
1"	25	30.5	4	12	300
1 1/4"	32	38.3	4	12	425
1 1/2"	38	46	4	12	650
	40	48	4	12	680
	45	54	4	12	860
2"	50	60	4	12	1080

METEOR

PVC IRRIGATION

In house, garden, field, construction and all kinds of irrigation works.



ID		OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
1/4"	6	5	15	80
5/16"	8	5	15	95
3/8"	10	5	15	115
1/2"	12.5	5	15	145
5/8"	15.5	5	15	175
3/4"	19	5	15	220
1"	25	4	12	340
1 1/4"	32	4	12	450

FLORA

PVC GARDEN IRRIGATION

Black PVC bottom-layer mixture, colored upstairs finished products, all kinds of garden and flower irrigation works.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
3/8"	10	14,5	5	15	130
1/2"	13	17,1	5	15	150
5/8"	16	20,4	5	15	195
3/4"	19	23,6	4	12	240
1"	25	30,2	4	12	350
1 1/4"	32	38	4	12	460

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

FOUNTAIN

GARDEN ORANGE

Yellow PVC bottom floor mixture, orange upstairs finished house, garden field, construction and all kinds of irrigation works.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
1/2"	13	17,6	10	30	160
5/8"	16	20,7	10	30	200
3/4"	19	24	10	30	245
1"	25	30,5	7	21	355
	30	38	7	21	600
1 1/4"	32	40	7	21	625
1 1/2"	38	46	5	15	730
	40	48	5	15	765
	45	55	5	15	1100
2"	50	60	3	9	1210

MARMARİS

GARDEN BLUE

White PVC bottom layer mixture, blue upper floor house, garden, field, construction and all kinds of irrigation works



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
1/2"	13	17,6	10	30	160
5/8"	16	20,7	10	30	200
3/4"	19	24	10	30	245
1"	25	30,5	7	21	355
	30	38	7	21	600
1 1/4"	32	40	7	21	625
1 1/2"	38	46	5	15	730
	40	48	5	15	765
	45	55	5	15	1100
2"	50	60	3	9	1210

BASEMENT

GARDEN GREEN

In house, garden, field, construction and all kinds of irrigation works.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
1/2"	13	17,6	10	30	160
5/8"	16	20,7	10	30	200
3/4"	19	24	10	30	245
1"	25	30,5	7	21	355
	30	38	7	21	600
1 1/4'	32	40	7	21	625
1 1/2'	38	46	5	15	730
	40	48	5	15	765
	45	55	5	15	1100
2"	50	60	3	9	1210

CARAMEL

GARDEN - GREENHOUSE FLUORESCENT

. Very flexible PVC inner surface. Garden irrigation and general waterworks drain



ID		WEIGHT
inch	mm	gr/m
1/2"	12.5	125
1/2"	12.5	160
5/8"	16	170
3/4"	19	220
3/4"	19	240
1"	25	340
1 1/4"	32	500
1 1/2"	38	700

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

BRAIDED HOSES

OLYMPOS LD

LIGHT PVC BRAIDED

All kinds of light duty irrigation, air, acid, salt, light chemicals, etc. in the evacuation works.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
1/4"	6	11	20	60	85
5/16"	8	13	20	60	105
3/8"	10	15	20	60	125
1/2"	13	18	15	45	150
5/8"	16	21	14	42	185
3/4"	19	25	13	39	270
1"	25	32	9	27	385

OLYMPOS FOOD

LIGHT BRAIDED PVC SERVICE

Food Grade

Drinking water made of PVC suitable for food, soft drinks etc. in the discharge works.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
1/4"	6	11	20	60	85
5/16"	8	13	20	60	105
3/8"	10	15	20	60	125
1/2"	13	18	15	45	150
5/8"	16	21	14	42	185
3/4"	19	25	13	39	270
1"	25	32	9	27	385

OLYMPOS ST

PVC BRAIDED

All kinds of light duty irrigation, air, acid, salt, light chemicals, etc. in the evacuation works.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
1/4"	6	12	25	75	105
5/16"	8	14	25	75	130
3/8"	10	16	20	60	155
1/2"	13	19	16	48	190
5/8"	16	22	16	48	225
3/4"	19	26	14	42	310
1"	25	33	10	30	450
1 1/4"	32	40	8	24	580
1 1/2"	38	48	7	21	880
	40	50	6	18	890
	45	55	6	18	990
2"	50	61	6	18	1200

OLYMPOS HD-OIL

HEAVY DUTY BRAIDED PVC AKARZAMAN

All kinds of light duty irrigation, air, acid, salt, light chemicals, etc. in the evacuation works.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
5/32"	4	10	24	72	90
1/4"	6	12	23	69	110
5/16"	8	14	23	69	140
3/8"	10	16	21	63	155
1/2"	12	18,2	20	60	195
5/8"	16	24	18	54	320
3/4"	19	27	16	48	365
1"	25	34	13	39	520
1 1/4"	32	41	8	24	650
1 1/2"	38	48,4	7	21	890
2"	50	61	6	18	1220

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

GORDION

THERMORUB® LOWPRESSURE WATER

TS 8507

In house, garden, field, construction and all kinds of irrigation works.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
1/2"	12.5	18	7	21	200
5/8"	16	22	7	21	265
3/4"	19	26	7	21	375
1"	25	33	7	21	550
1 1/4"	32	41	7	21	775
1 1/2"	38	50	7	21	1250
2"	50	62	7	21	1600

ODEON L

SPRAYER (SPRAYING) 20-40 BAR

In vineyards, gardens, olive groves, orchards and similar places, spraying high-pressure pesticides.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
20BAR					
5/16"	8	13	20	60	115
3/8"	10	15	20	60	135
1/2"	12.5	19	20	60	220
5/8"	16	23	20	60	290
3/4"	19	26	20	60	345
1"	25	33.5	20	60	530
40BAR					
5/16"	8	14	40	120	140
3/8"	10	16	40	120	175
1/2"	12.5	20	40	120	275
5/8"	16	24	40	120	350
3/4"	19	28	40	120	455
1"	25	35	40	120	640

ASSOS

THERMORUB® LIGHT SERVICE AIR

TS EN ISO 5774

In air-powered tools and all kinds of compressed air discharge.




ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
10BAR					
1/2"	12.5	20	10	40	290
5/8"	16	24	10	40	380
3/4"	19	28	10	40	500
1"	25	35	10	40	710
20BAR					
1/4"	6	13	20	60	155
5/16"	8	15	20	60	190
3/8"	10	17	20	60	225
1/2"	12.5	21	20	60	335
5/8"	16	25	20	60	435
3/4"	19	29	20	60	565
1"	25	36	20	60	790
1 1/4"	32	44	20	60	1080
1 1/2"	38	50	20	60	1250
2"	50	64	10	30	1840

ODEON

SPRAYING 50-80-100 BAR

Special PVC mixture resistant to pesticides, fertilizers, in high-pressure pesticide spraying works in vineyards, gardens, olive groves, orchards and similar places.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
50 BAR					
5/16"	8	14	50	150	145
3/8"	10	17	50	150	200
1/2"	12.5	20	50	150	270
80BAR					
5/16"	8	15	80	240	180
3/8"	10	18	80	240	240
1/2"	12.5	21	80	240	310
90BAR					
5/16"	8	15	100	300	185
3/8"	10	18	100	300	245
1/2"	12.5	21	100	300	320

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

AIR-PUMP

THERMORUB® AIR PUMP

TS EN 1S0 577 4

Air pumps at service stations, car tire inflations and all kinds of air evacuations.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
3/16"	4.5	11,5	10	40	130
3/16"	4.7	10	10	40	90
1/4"	6	15	10	40	220

ARES

PU-PVC AIR

TS EN 1S0 5774

In air applications that require high performance.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
1/4"	6	10	20	60	70
5/16"	8	12	20	60	85
3/8"	10	15	20	60	125
1/2"	13	19	20	60	190

AIR HONE

AIR HONE

In air-powered tools and all kinds of compressed air discharge.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
1/4'	6	12	20	60	125
1/4'	6	13,5	20	60	175
5/16"	8	14	20	60	155
5/16"	8	15	20	60	195
5/16"	8	16	20	60	225
	9	16	20	60	210
3/8'	10	17	20	60	230
3/8'	10	17,5	20	60	250
1/2"	12.7	21	20	60	335

AIR HOSE TWIN

PU-PVC AIR

In air-powered tools and all kinds of compressed air discharge.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
1/4"	6	12	20	60	250
1/4"	6	13,5	20	60	350
	6.3	15,9	20	60	465
	9	16	20	60	465
5/16"	8	14	20	60	310
5/16"	8	14	20	60	310
5/16"	8	15	20	60	390
5/16"	8	15	20	60	390
5/16"	8	15	20	60	425
3/8"	10	17	20	60	425
5/16"	8	16	20	60	450
5/16"	8	16	20	60	450
3/8"	10	17	20	60	460
3/8"	10	17	20	60	460
3/8"	10	17,5	20	60	500
3/8"	10	17,5	20	60	500
1/2"	12.7	21	20	60	670
1/2"	12.7	21	20	60	670

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

CYLINDER GAS

LPG CYLINDER

TS 1846

In homes and kitchens, lpg, butane/propane gas cylinders are connected.



ID		ÇB	PB	Ağr
inch	mm	bar	bar	gr/m
1/4"	6	12	3,5	105
5/16"	8	14	3,5	130
3/8"	10	16	3,5	150

TORCH

WELDING MACHINE HOSE

Water distribution and cooling works for electric welding machines.




ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
5/32"	4	7	10	30	35
3/16"	5	8	10	30	40
1/4"	6	11	10	30	85
5/16"	8	13	10	30	100
	9	14	10	30	105
3/8"	10	15	10	30	120

CYLINDER +

LPG TUBEGAS BRAIDED

TS 1846

In homes and kitchens, lpg, butane/propane gas cylinders are connected.



ID		OP	BP	WEIGHT
inch	mm	bar	bar	gr/m
5/16"	8	-	-	140
3/8"	10	-	-	150

FIRE REEL

THERMORUB® FIRE

TS EN 694 + A1

Special thermorub mixture, in fire extinguishing works, fire cabinets.




ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
12 BAR					
3/4"	19	26	12	42	385
1"	25	33	12	42	565
1 1/4"	33	43	7	25	910
20BAR					
1/2"	12.5	19	20	70	235
3/4"	19	26	20	70	380
1"	25	33	20	70	560

CYLINDER GAS CC

LPG DOUBLE CHIP

TS 1846

LPG resistant special PVC mixture, butane, propane, LPG gas cylinders in homes and kitchens connection works.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
5/16"	8	15	20	60	160
3/8"	10	17	20	60	185

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m

FUEL

DIESEL

Flexible flat fuel oil suitable for use in fuel oil and fuel-oil discharge and oil-resistant PVC/NITRILE bottom coat, chemical-resistant and wear-resistant upstairs finished products, textile-reinforced.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
5/8"	16	25	20	60	415
3/4"	19	28	20	60	470
1"	25	34	20	60	595
1 1/4"	32	44	20	60	1060

SHOWER

SHOWER HOSE

Bath, water heater, reservoir connection hose.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
5/16"	7.7	12,4	10	30	90
5/16"	8	13	10	30	105
3/8"	9.5	14	10	30	105

WASH

SHOWER HOSE

Bath, water heater, reservoir connection hose.



ID		OD	OP	BP	WEIGHT
inch	mm	mm	bar	bar	gr/m
5/16"	8	15	20	60	195
3/8"	10	17	20	60	225
1/2"	2.5	20	20	60	290

TECHNO

PURE TRANSPARENT PVC HOSE

Very strong flexible and flat PVC, in automatic systems, in automobiles, in industry, in level indicators, in the discharge of water, soap, detergent, chemical, fuels, solutions.



ID	OD	WEIGHT
4	8	45
5	9	55
6	8	30
6	10	60
7	12	95
8	10	35
8	11	55
8	13	100
9	14	110
10	13	70
10	14	95
10	16	150
12.7	16	90
12.7	17	125
16	20	140
16	21	180
19	23	165
19	24	210
25	30	265
25	31	325
32	38	405
38	45	560
40	48	675
50	60	1050

ID	OD	OP	BP	BR	WEIGHT
inner diameter	outer diameter	operating pressure	burst pressure	bend radius	gr/m